

#### **Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)


+ XXX-XXXX (Accessory 1)

Weight	6.40 lb
Light distribution	symmetric, very narrow beam [VN]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
Tj	85
Delivered lumens (lm)	
LED Lumen	240.3
Total Lumen	2883.7
Та	25

# we-ef

#### **DOC220 LED Stainless Steel**

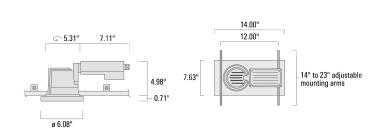



## **Specifications**

## **Material description**

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

### **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

#### **Additional information**

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
----------	---

Listings ETL listed. Suitable for wet applications.




# **Mounting Accessories**

### **Installation blockout**

Description	Part ID	Α	В	C1	С			
Installation blockout BDO22-I	134-0797	15.08"	7.87"	8.23"	195			







# **Optical Accessories**

### **Softening Lens**

Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13





## **Honeycomb louvre**

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13



#### Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	ED 134-1491	4.13





## **Linear spread lens**

Description	Part ID	C1	
IO-180-DAC/DOC220-LED	134-1381	4.13	

