



Description

Pole or wall-mounted LED luminaire with integrated heat sinks.

IP66. Class I or Class II. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Spigot Ø 3"x5" optional available, must be indicated during order placement. Luminaire is factory-sealed and does not need to be opened during installation.

Recommended mounting height 10-30 ft, depending on lamp type selected.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                              |
|--------------------|------------------------------|
| Weight             | 14.60 lb                     |
| Light distribution | [R65] Type IV Medium         |
| Light source       | LED-24/24W / 350 mA - 3000 K |
| CRI                | 80                           |
| Power supply       | electronic gear              |
| BUG                | B1 U0 G1                     |
| LEDs               | 24                           |
| Rated input power  | 26.5 W                       |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 155  |
| Total Lumen        | 3720 |
| Tj                 | 85   |

|                       |        |
|-----------------------|--------|
| Delivered lumens (lm) |        |
| LED Lumen             | 139.3  |
| Total Lumen           | 3343.8 |
| Ta                    | 25     |

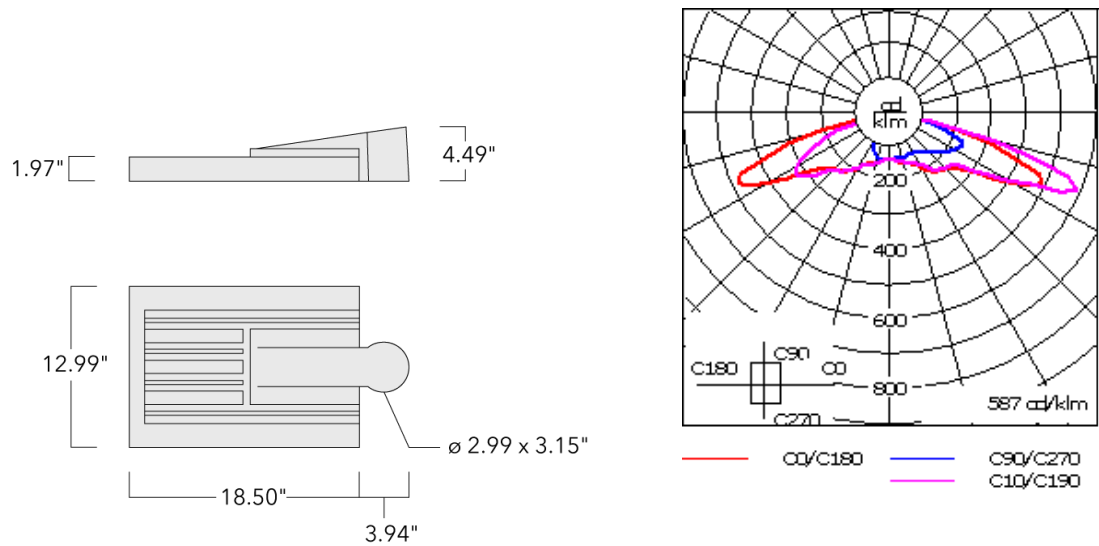

Specifications

Material description

|                      |                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade die-cast aluminium alloy                                                                                                                             |
| Lens                 | PMMA RFC Reflection Contour Lens technology                                                                                                                       |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket                                                                                                                                            |
| Fasteners            | PCS Polymer Coated Stainless Steel hardware                                                                                                                       |
| Ingress protection   | IP66                                                                                                                                                              |
| Impact resistance    | IK08                                                                                                                                                              |
| Corrosion resistance | 5CE                                                                                                                                                               |
| Windage              | 1.75 ft <sup>2</sup>                                                                                                                                              |

**Electrical description**

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter                                                        |
| Power factor     | > 0.9                                                                                   |
| Surge protection | In-line bracket 10kV Surge Protector                                                    |


**Additional information**

|            |                                                                                       |
|------------|---------------------------------------------------------------------------------------|
| Lifetime   | Ta=25°/40° L90B10 > 90000h                                                            |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.                            |

Mounting Accessories


Wall and pole brackets RV

| Description      | Part ID  | Additional information | C1 | C2    | C3    | D1    | D × L1 | H1    | H2   | M1   | M2    | Weight (lb) | C   | D | H |
|------------------|----------|------------------------|----|-------|-------|-------|--------|-------|------|------|-------|-------------|-----|---|---|
| RV0 Wall bracket | 108-0979 | RV0 Wall bracket       |    | 4.25" | 3.94" | 2.36" |        | 7.87" | 6.3" | 1.5" | 0.47" | 4.41        | 108 |   |   |

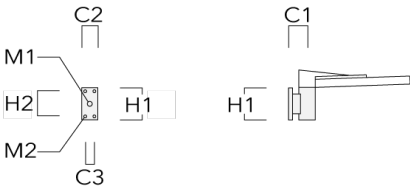


VFL530 LED

| Description                 | Part ID  | Additional information | C1 | C2 | C3 | D1 | D × L1 | H1 | H2 | M1 | M2 | Weight (lb) | C   | D  | H   |
|-----------------------------|----------|------------------------|----|----|----|----|--------|----|----|----|----|-------------|-----|----|-----|
| RV2-76 Pole bracket, double | 108-0980 | 5.79                   |    |    |    |    | 3 x 4  |    |    |    |    | 10.58       | 147 | 76 | 200 |



|                  |          |       |  |  |  |  |           |  |  |  |  |          |     |  |     |
|------------------|----------|-------|--|--|--|--|-----------|--|--|--|--|----------|-----|--|-----|
| RV5 Pole bracket | 108-0982 | 4.25" |  |  |  |  | 3.0"-9.5" |  |  |  |  | 3.75 lbs | 106 |  | 200 |
|------------------|----------|-------|--|--|--|--|-----------|--|--|--|--|----------|-----|--|-----|

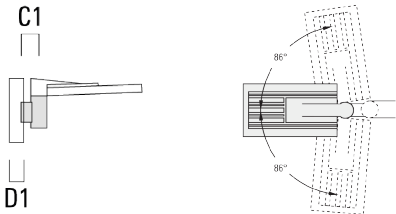

Optical Accessories

Light shield

| Description | Part ID  | Additional information                                                                                                                                                                          |
|-------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LS180-[A60] | 430-0038 | Light shield LS180 to greatly reduce or eliminate light pollution.<br>PA injection moulded component, black matt.<br>Suitable for asymmetric light distribution [A60].                          |
| LS180       | 430-0029 | Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit.<br>Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering. |