

DOC220-FT LED Stainless Steel



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA-Diffusor-Lens for glare control and soft wide beam distribution. Anodized aluminum reflector. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.


Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	7.10 lb
Light distribution	symmetric, wide beam, Darklight [BD]
Light source	LED-FT-24W (4000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W

Delivered lumens (lm)	
LED Lumen	2364.6
Total Lumen	2364.6
Ta	25

Nominal Lumen (lm)	
LED Lumen	4100
Total Lumen	4100
Tc	25

DOC220-FT LED Stainless Steel

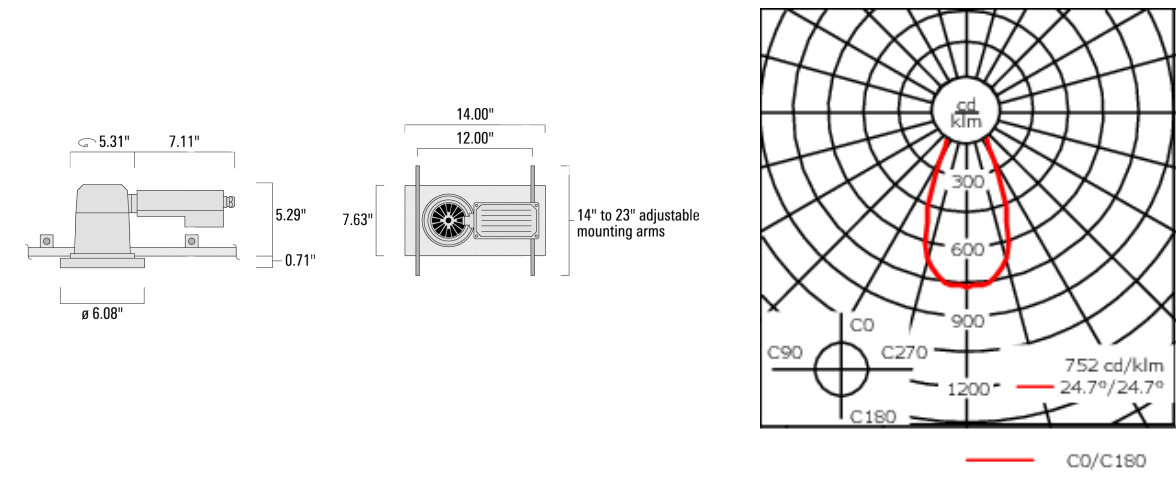

Specifications  
Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	<div><div></div> Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

