

## DOC220-FT LED Stainless Steel

**Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA-Diffuser-Lens for glare control and soft wide beam distribution. Anodized aluminum reflector. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	7.10 lb
Light distribution	symmetric, wide beam, Darklight [BD]
Light source	LED-FT-24W (4000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W



**Delivered lumens (lm)**

LED Lumen	2364.6
Total Lumen	2364.6
Ta	25

**Nominal Lumen (lm)**

LED Lumen	4100
Total Lumen	4100
Tc	25

**DOC220-FT LED Stainless Steel**

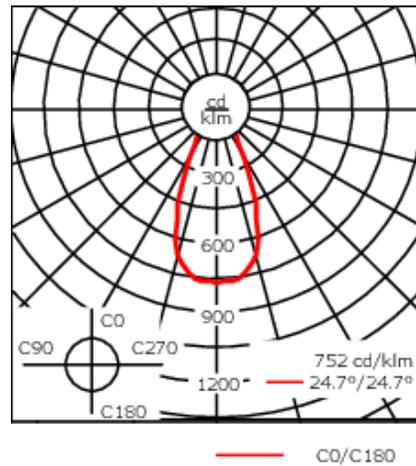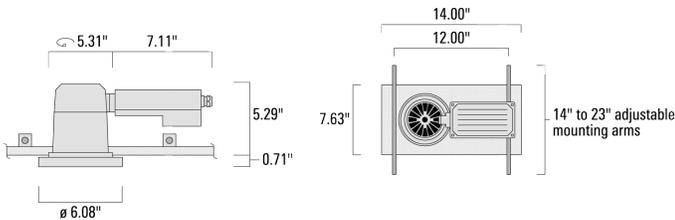

**Specifications**

**Material description**

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

**Additional information**

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

**Mounting Accessories**

**Installation blackout**

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

