DOC220-FT LED Stainless Steel



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA-Diffusor-Lens for glare control and soft wide beam distribution. Anodized aluminum reflector. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

Weight	7.10 lb
Light distribution	symmetric, wide beam, Darklight [BD]
Light source	LED-FT-24W (4000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W
Delivered lumens (lm)	
LED Lumen	2364.6
Total Lumen	2364.6
Та	25
Nominal Lumen (lm)	
LED Lumen	4100
Total Lumen	4100
Tc	25

we-ef

DOC220-FT LED Stainless Steel

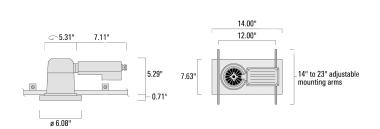



Specifications

Material description

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10)	
	Control gear >50.000 h Ta 25°	
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.	



DOC220-FT LED Stainless Steel

Mounting Accessories

Installation blockout

Description	Part ID	А	В	C1	С			
Installation blockout BDO22-I	134-0797	15.08"	7.87"	8.23"	195			



