DOC240-GB LED Stainless Steel



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.


Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

Weight15.60 lbLight distributionlinear spread, very narrow beam, 'sharp cut-off'Light sourceLED-12/18W / 500 mA - 3000 KCRI80Power supplyelectronic gearLEDs12Rated input power21 WNominal Lumen (Im)LED Lumen215Total Lumen2580Tj85Delivered lumens (Im)LED Lumen177.1Total Lumen2124.7Ta25		
Light source LED-12/18W / 500 mA - 3000 K CRI 80 Power supply electronic gear LEDs 12 Rated input power 21 W Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Weight	15.60 lb
CRI 80 Power supply electronic gear LEDs 12 Rated input power 21 W Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Light distribution	
Power supply electronic gear LEDs 12 Rated input power 21 W Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Light source	LED-12/18W / 500 mA - 3000 K
LEDs 12 Rated input power 21 W Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	CRI	80
Rated input power 21 W Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Power supply	electronic gear
Nominal Lumen (Im) LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	LEDs	12
LED Lumen 215 Total Lumen 2580 Tj 85 Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Rated input power	21 W
Total Lumen 2580 Tj 85 Delivered lumens (lm) LED Lumen 177.1 Total Lumen 2124.7	Nominal Lumen (lm)	
Tj 85 Delivered lumens (lm) LED Lumen 177.1 Total Lumen 2124.7	LED Lumen	215
Delivered lumens (Im) LED Lumen 177.1 Total Lumen 2124.7	Total Lumen	2580
LED Lumen 177.1 Total Lumen 2124.7	Tj	85
Total Lumen 2124.7	Delivered lumens (lm)	
	LED Lumen	177.1
Ta 25	Total Lumen	2124.7
	Та	25

DOC240-GB LED Stainless Steel

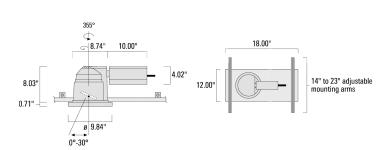



Specifications

Material description

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.