

DOC240-GB LED Stainless Steel



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------------|
| Weight | 15.60 lb |
| Light distribution | symmetric, medium beam [M] |
| Light source | LED-12/18W / 500 mA - 3000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 21 W |


Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 215 |
| Total Lumen | 2580 |
| Tj | 85 |

Delivered lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 185.3 |
| Total Lumen | 2223.1 |
| Ta | 25 |

DOC240-GB LED Stainless Steel

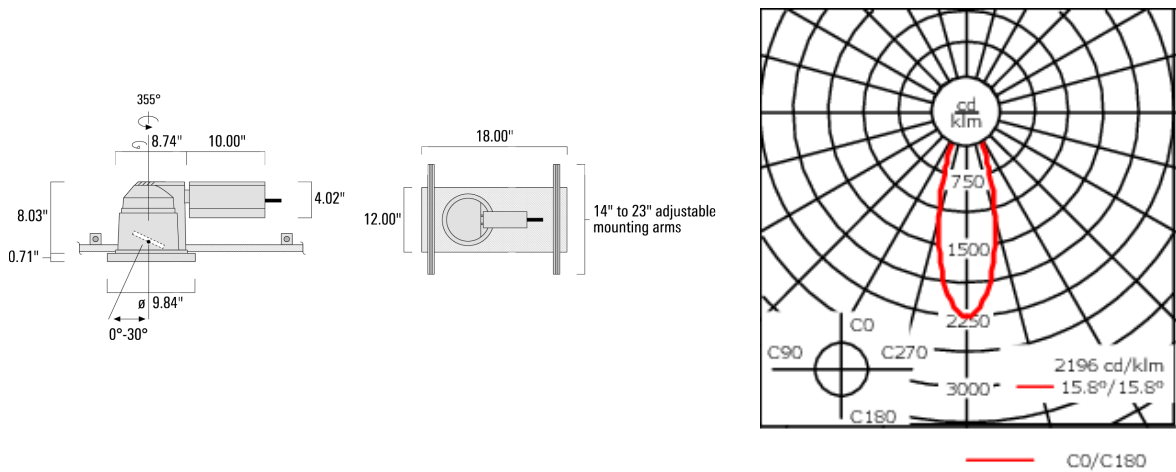

Specifications
Material description

| | |
|----------------------|--|
| Body | Luminaire body constructed in die cast aluminum. |
| Lens | Clear tempered glass lens. |
| Colors | <div></div> Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|--------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
|--------------|---|

Additional information

| | |
|----------|---|
| Lifetime | LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25° |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |