

**DOC240-GB LED Stainless Steel****Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	15.60 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/18W / 500 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	21 W



**Nominal Lumen (lm)**

LED Lumen	215
Total Lumen	2580
Tj	85

**Delivered lumens (lm)**

LED Lumen	167.4
Total Lumen	2008.5
Ta	25

**DOC240-GB LED Stainless Steel**

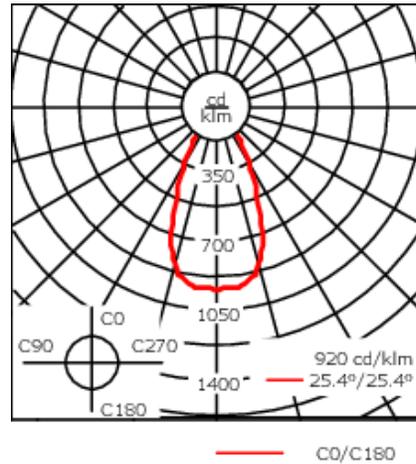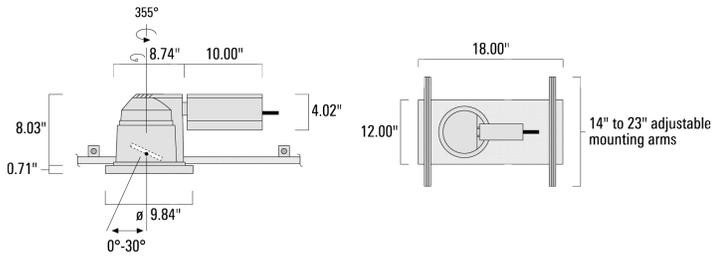

**Specifications**

**Material description**

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

**Additional information**

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.