

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)


+ XXX-XXXX (Accessory 1)

Weight	15.60 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/18W / 500 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	21 W
Nominal Lumen (lm)	
LED Lumen	230
Total Lumen	2760
Tj	85
Delivered lumens (lm)	
LED Lumen	179.1
Total Lumen	2148.7
Та	25

we-ef

DOC240-GB LED Stainless Steel

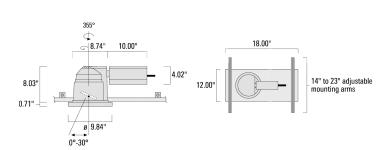



Specifications

Material description

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.