



Description

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed LED circuit board. LED boards can be easily removed for up-grading.



The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|----------------------------------|
| Weight | 13.90 lb |
| Light distribution | symmetric, diffused distribution |
| Light source | 1 LED white 15.5W (4000K) |
| CRI | 75 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 14 W |

| | |
|-----------------------|-------|
| Delivered lumens (lm) | |
| LED Lumen | 308.9 |
| Total Lumen | 308.9 |
| Ta | 25 |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 2300 |
| Total Lumen | 2300 |
| Tc | 25 |

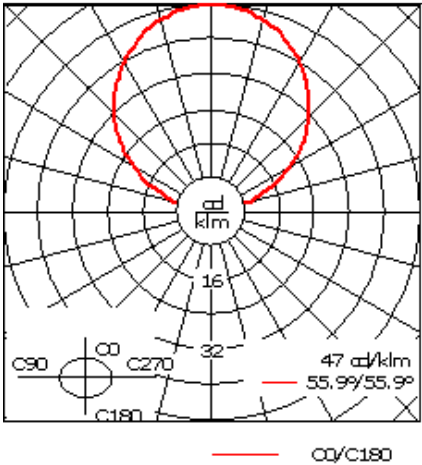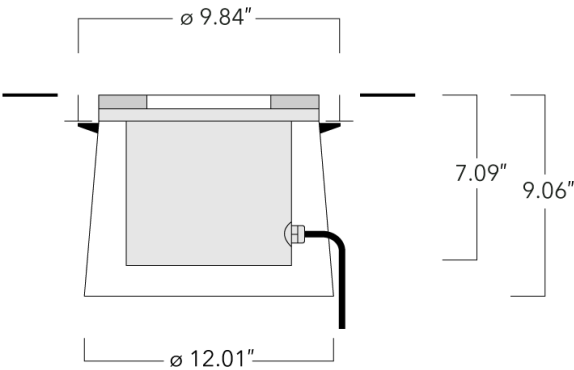

Specifications
Material description

| | |
|----------------------|--|
| Body | Luminaire body constructed of stainless steel. Outer housing composite material. |
| Lens | Tempered glass lens with internal white ceramic glazing. Max. load 5 tonnes. |
| Colors | <div></div> Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP67 |
| Impact resistance | IK10+ |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Termination | Factory sealed termination chamber |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | Contact WE-EF USA for ETL/UL certification status. |

Electrical Accessories

Sealable junction box

| Description | Part ID | C1 | M1 | M2 |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |

