



Description



IP67, Class I. Class II on request. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. PMMA main lens. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°.

Separate LED driver with DALI interface.

| | |
|--------------------|------------------------------------|
| Weight | 1.20 kg |
| Light distribution | symmetric linear, medium beam [LM] |
| Light source | LED-16/10W / 225 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 16 |
| Rated input power | 13 W |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 90 |
| Total Lumen | 1440 |
| Tj | 85 |

| | |
|-------------------|--------|
| Rated lumens (lm) | |
| LED Lumen | 66.9 |
| Total Lumen | 1070.2 |
| Ta | 25 |

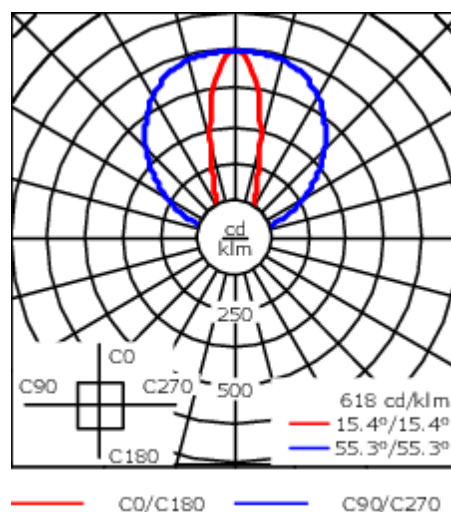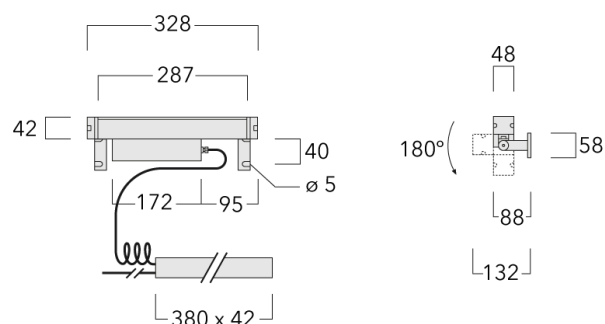

Specifications

Material description

| | |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body | Marine-grade, all-aluminium construction |
| Lens | PMMA |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP67 |
| Impact resistance | IK09 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|-----------------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Separate LED driver with DALI Interface |

Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | D (Light source) |