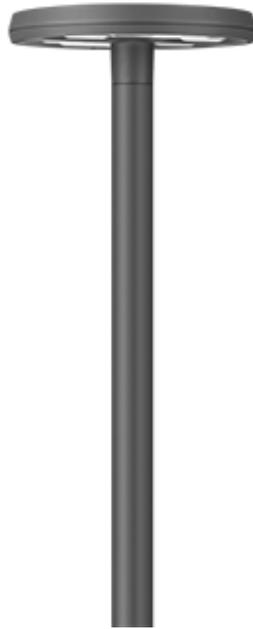


RMT320 Two-sided - One circuit

**Description**

IP66. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. RFC™ Reflection Free Contour main lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral electronic converter with DALI interface. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Including 0.5 m cable with a cable connector.

Maximum spacing for pathway and streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height.

Wild-Light options available on request.

Weight	8.00 kg
Light distribution	asymmetric, side throw [S70]
Light source	LED-24/104W / 1400 mA - 3000 K
CRI	80
Power supply	EC
BUG	B3 U0 G3
LEDs	24
Rated input power	106 W
Nominal Lumen (lm)	
LED Lumen	550
Total Lumen	13200
Tj	85
Rated lumens (lm)	
LED Lumen	479.7
Total Lumen	11512.4
Ta	25

Control

R2C Ready to Connect

Description	Part ID
R2C Ready to Connect (top)	430-0019
