

DAC220 LED



Description

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation over recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	6.40 lb
Light distribution	wallwash [A20]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W



Nominal Lumen (lm)

LED Lumen	290
Total Lumen	3480
Tj	85

Delivered lumens (lm)

LED Lumen	200.5
Total Lumen	2405.6
Ta	25

DAC220 LED

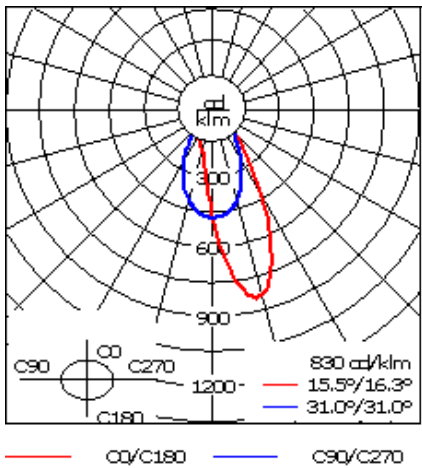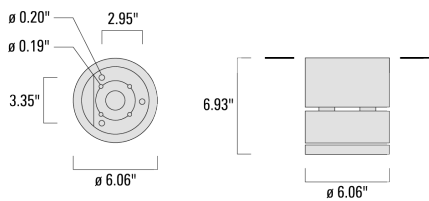

Specifications
Material description

Table with 2 columns: Specification and Description. Rows include Body (Marine-grade die-cast aluminium alloy), Colors (RAL9004 Black, RAL9007 Grey Metallic, RAL9016 White, RAL8019 Dark Bronze), Gasket (Silicone rubber gasket), Fasteners (PCS Polymer Coated Stainless Steel Hardware), Ingress protection (IP65), Impact resistance (IK07), and Corrosion resistance (5CE).

Electrical description

Table with 2 columns: Specification and Description. Rows include Power supply (Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.) and Driver / Ballast (Integral EC electronic converter in thermally-separated compartment).

Additional information


Table with 2 columns: Specification and Description. Rows include Lifetime (Ta=25°/40° L90B10 > 90000h) and Listings (ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations).

DAC220 LED

Optical Accessories

Linear spread lens


Description	Part ID	C1
IO-180-DAC/DOC220-LED	134-1381	4.13



DAC220 LED


Softening Lens

Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13



Honeycomb louvre

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13



DAC220 LED

Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	134-1491	4.13

