



Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.


Weight	1.20 kg
Light distribution	asymmetric, forward-throw [A60]
Light source	LED-18/9W / 500 mA - 3000 K
CRI	80
Power supply	EC
BUG	B0 U1 G0
LEDs	1
Rated input power	11 W

Rated lumens (lm)

LED Lumen	360.7
Total Lumen	360.7
Ta	25

Nominal Lumen (lm)

LED Lumen	1500
Total Lumen	1500
Tc	25

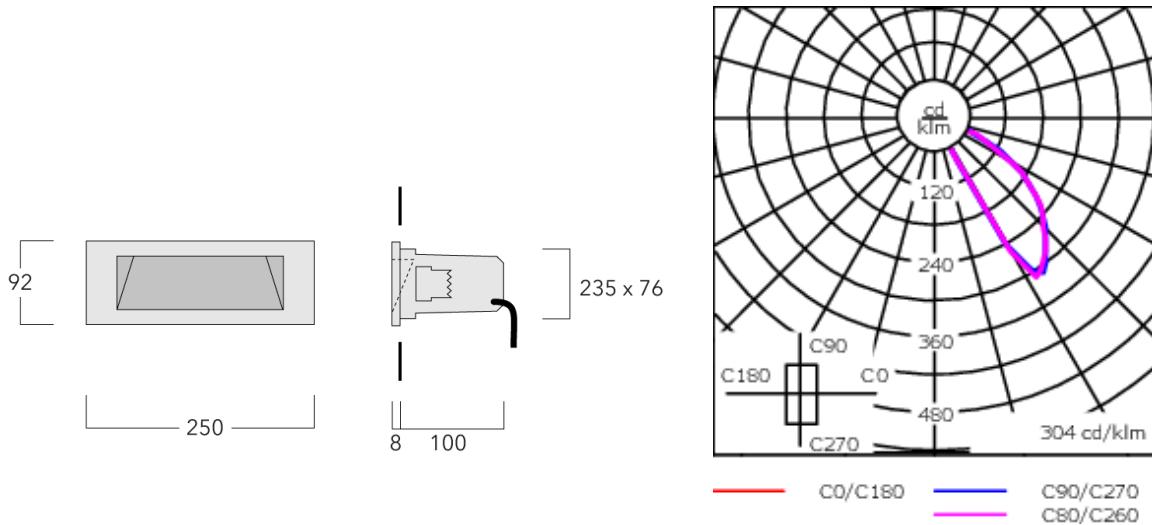

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

Additional information


Lifetime Ta=25° L80B10 > 54000h

Energy efficiency class C (Light source)

Mounting Accessories

Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST25-I	133-0076	267	132	130	130

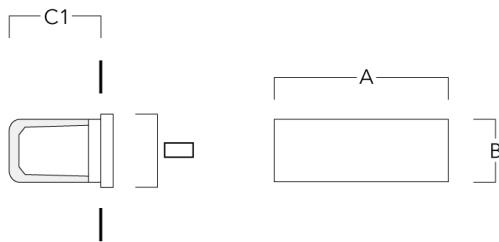

Installation breakout BST25-II	133-0078	267	132	140	140
--------------------------------	----------	-----	-----	-----	-----

