

**Description**

Downward aimed shielded light source.

ADA (American Disabilities Act) Compliant.



IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	6.60 lb
Light distribution	asymmetric, forward-throw [A60]
Light source	LED-36/8W - 3000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	10 W
<b>Delivered lumens (lm)</b>	
LED Lumen	355.9
Total Lumen	355.9
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	1480
Total Lumen	1480
Tc	25

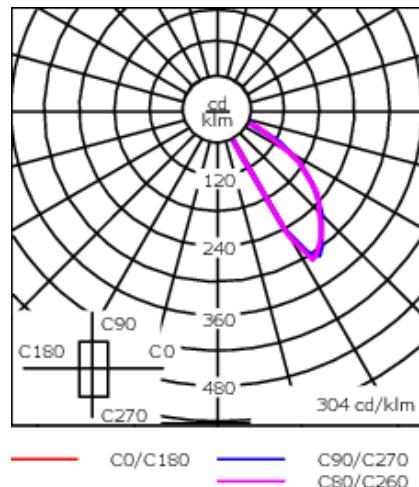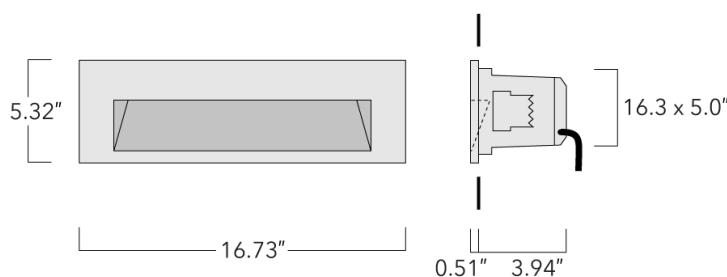

## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: black; border-radius: 5px;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #808080; border-radius: 5px;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #F0F0F0; border-radius: 5px;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: black; border-radius: 5px;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

**Additional information**

---

Lifetime Ta=25°/40° L80B10 > 54000h

Listings ETL Listed. Suitable for wet locations.

---

## Mounting Accessories

### Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST27-I	133-0217	17.60	6.18	5.20	130

