



Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.



Weight	3.00 kg
Light distribution	asymmetric, forward-throw [A60]
Light source	LED-36/8W - 4000 K
CRI	75
Power supply	EC
LEDs	1
Rated input power	10 W

Rated lumens (lm)

LED Lumen	384.8
Total Lumen	384.8
Ta	25

Nominal Lumen (lm)

LED Lumen	1600
Total Lumen	1600
Tc	25

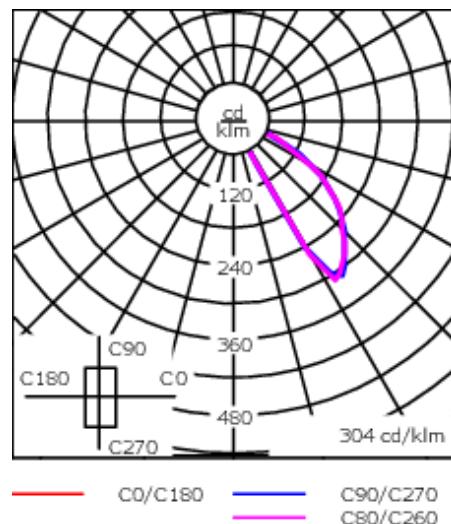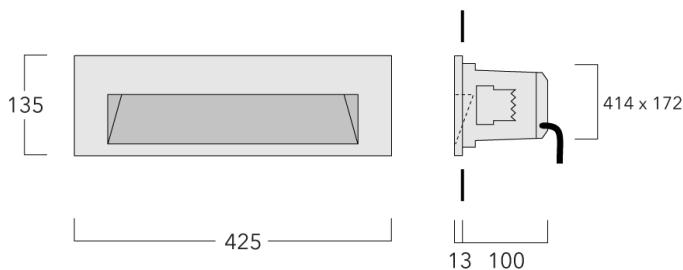

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Signal black </div> <div style="text-align: center;"> RAL9006 White aluminium </div> <div style="text-align: center;"> RAL9007 Grey aluminium </div> <div style="text-align: center;"> RAL7016 Anthracite grey </div> <div style="text-align: center;"> RAL9016 Traffic white </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

Additional information


Lifetime Ta=25° L80B10 > 54000h

Energy efficiency class C (Light source)

Mounting Accessories

Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST27-I	133-0217	447	157	125	130

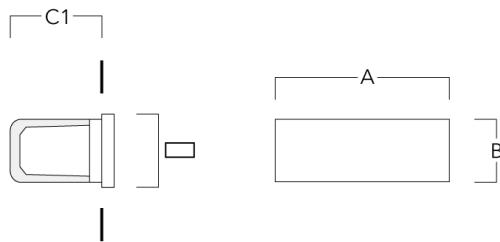

Installation breakout BST27-II	133-0219	447	157	135	140
--------------------------------	----------	-----	-----	-----	-----

