

Description

Downward aimed shielded light source.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	6.60 lb		
Light distribution	asymmetric, forward-throw [A60]		
Light source	LED-36/8W - 4000 K		
CRI	75		
Power supply	electronic gear		
LEDs	1		
Rated input power	10 W		
Delivered lumens (lm)			
LED Lumen	384.8		
Total Lumen	384.8		
Та	25		
Nominal Lumen (lm)			
LED Lumen	1600		
Total Lumen	1600		
Тс	25		
-			



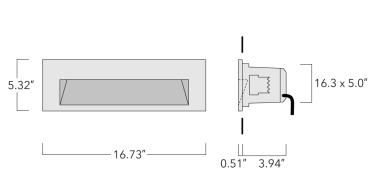



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK10
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

133-0403

we-ef

STI279 LED

Additional information

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL Listed. Suitable for wet locations.



Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1	C
Installation blockout BST27-I	133-0217	17.60	6.18	5.20	130

