

#### Description


IP66, Class I. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. RFC<sup>™</sup> Reflection Free Contour main lens. Silicone CCG<sup>®</sup> Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral electronic converter with DALI interface. CADoptimised optics for superior illumination and glare control. OLC<sup>®</sup> One LED Concept. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Including 0.5 m cable with a cable connector.

Maximum spacing for pathway and streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height.

Weight	10.00 kg
Light distribution	asymmetric, side throw [S65]
Light source	LED-24/48W / 700 mA - 3000 K
CRI	80
Power supply	EC
BUG	B1 U0 G1
LEDs	24
Rated input power	54 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	6960
Тј	85
Rated lumens (lm)	
LED Lumen	253.4
Total Lumen	6081.1
Та	25

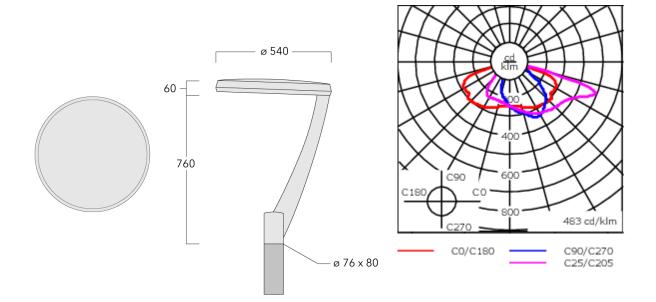

# Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	RFC™ Reflection Free Contour main lens
Colours	RAL9004 Signal black
	RAL9007 Grey aluminium
	RAL7016 Anthracite grey
	RAL9016 Traffic white
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE

### **Electrical description**

Driver / Ballast	Integral electronic converter with DALI interface		
Additional information			

Lifetime	Ta=25° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare

RMM320 LED

## Control

### **R2C** Ready to Connect

Description	Part ID
R2C Ready to Connect (top)	430-0019