



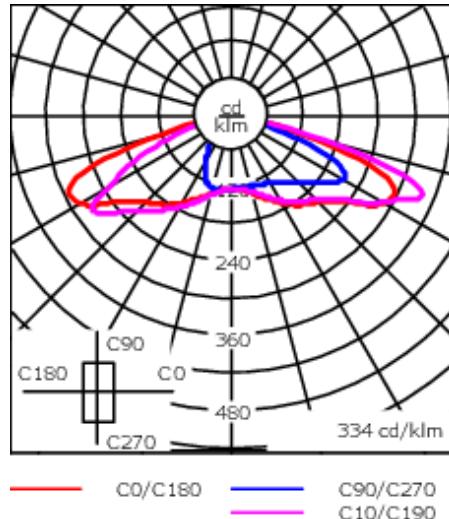

### Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass, hinged. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Luminaire +/-30° tiltable.

Weight	8.50 kg
Light distribution	rectangular, side throw [R65]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	3480
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	202.9
Total Lumen	2434.4
T <sub>a</sub>	25

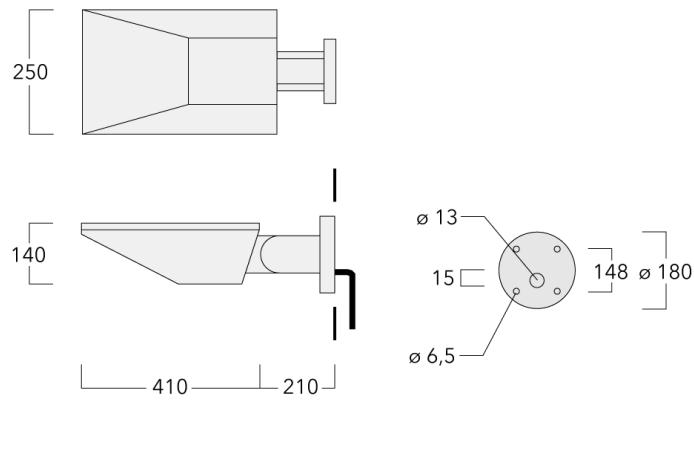

## Specifications

### Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens, hinged

Colours  RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66

Impact resistance IK08

Corrosion resistance 5CE+Primer

### Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

### Additional information

Lifetime  $T_a=40^\circ L90B10 > 90000h$

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on [www.we-ef.com](http://www.we-ef.com) for further details.