

146-7056+146-0439

FLC141 LED Wall bracket

we-ef



Description

IP55, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

Weight	5.80 kg
Light distribution	linear spread, very narrow beam, sharp cut-off [EES]
Light source	LED-24/48W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	54 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	6960
T _j	85
Rated lumens (lm)	
LED Lumen	254.4
Total Lumen	6104.9
T _a	25

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29



<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 19/04/2025

146-7056+146-0439



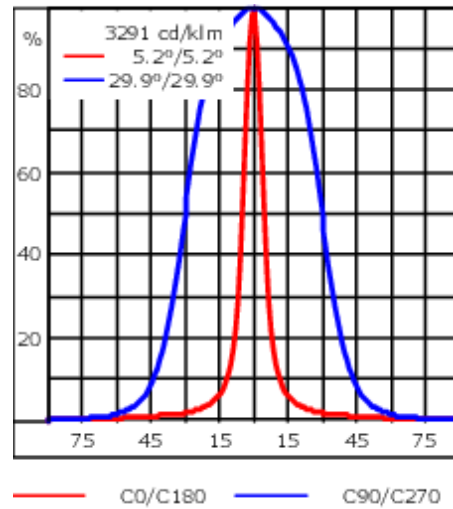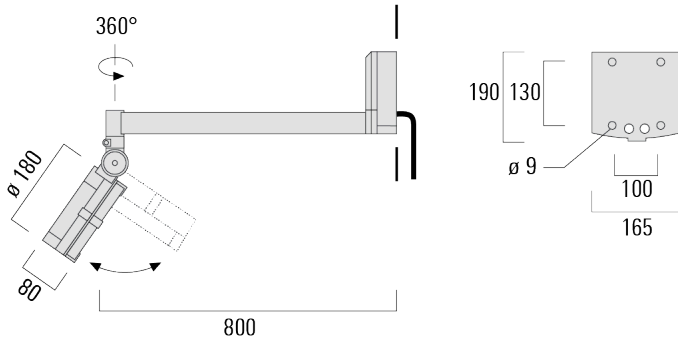

FLC141 LED Wall bracket

we-ef



Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 19/04/2025

Optical Accessories


Glare shield

Description	Part ID	A	C1
Glare shield ES	146-0229	120	145



Snoot


Description	Part ID	A	C1
Snoot ET	146-0398	120	145



FLC141 LED Wall bracket


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	146-0439	145



Flood lens


Description	Part ID	C1
Flood lens IO-360	146-9950	145



FLC141 LED Wall bracket

Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	146-0646	145



Linear louvre


Description	Part ID	C1
Linear louvre IL	146-9056	145



FLC141 LED Wall bracket


Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	146-0626	145



Colour correction filter

Description	Part ID
IF-3000K > 2400K	146-9058



Control

DALI interface

Description	Part ID	Additional information
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!