

147-0684

FLA740 LED

we-ef



Description

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Protractor scale for accurate aiming from 0° to 15° above horizontal.

Recommended mounting height 10-30 ft, depending on lamp type selected.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|-------------------------------|
| Weight | 16.31 lb |
| Light distribution | [A60] Type IV Very Short |
| Light source | LED-24/72W / 1050 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| BUG | B2 U0 G2 |
| LEDs | 24 |
| Rated input power | 79 W |



| Nominal Lumen (lm) | |
|--------------------|-------|
| LED Lumen | 450 |
| Total Lumen | 10800 |
| Tj | 85 |

| Delivered lumens (lm) | |
|-----------------------|--------|
| LED Lumen | 336.2 |
| Total Lumen | 8068.2 |
| Ta | 25 |

147-0684

FLA740 LED

we-ef

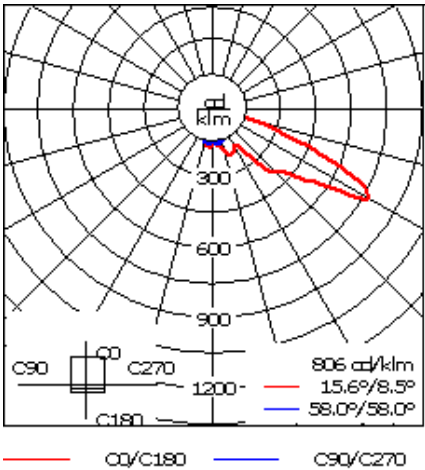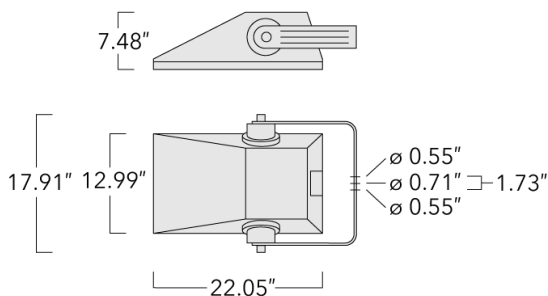

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK08 |
| Corrosion resistance | 5CE |
| Windage | 1.0 |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 120-277V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | Integral 10kV Surge Protector |

147-0684

FLA740 LED




Additional information

| | |
|------------|---|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |


Mounting Accessories

Floodlight mounting bracket TA


| Description | Part ID | A | C1 | D × L1 | L | Weight (lb) | D × S |
|--|----------|---|------|--------|------|-------------|----------|
| TA2 Mounting bracket, double (Ø 3 x 8) | 147-0024 | | 5.12 | 3 x 8 | 2.99 | 4.2 lbs | 76 x 200 |



| | | | | | | | |
|--|----------|------|-------|-------|------|-------|----------|
| TA2-L Mounting bracket, double (Ø 3 x 8) | 147-0105 | ±90° | 16.54 | 3 x 8 | 2.99 | 35.49 | 76 x 200 |
|--|----------|------|-------|-------|------|-------|----------|

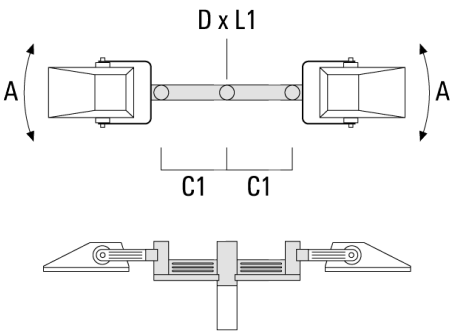


| Description | Part ID | A | C1 | D × L1 | L | Weight (lb) | D × S |
|--|----------|-----|-------|---------|-----|-------------|--------|
| TA4-L Mounting bracket, quad (Ø 3.5 x 8) | 147-0465 | ±9° | 27.17 | 3.5 x 8 | 3.5 | 49.82 | 89x200 |

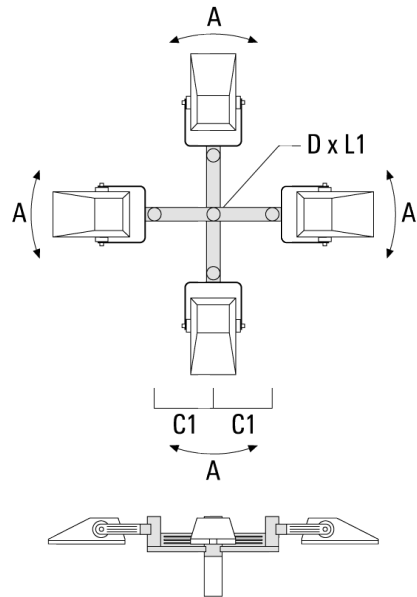


Pole clamp TS

| Description | Part ID | D1 | Weight (lb) | D |
|--|----------|--------|-------------|-------|
| TS2-740 Pole clamp, double (Ø 3"-3.5") | 147-6902 | 3-3.5" | 3.09 lbs | 76-89 |

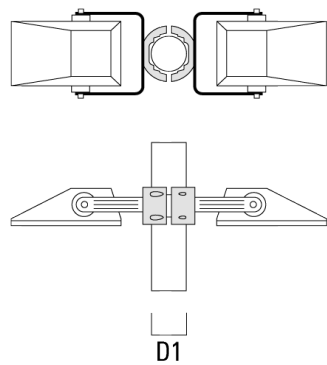


FLA740 LED

| Description | Part ID | D1 | Weight (lb) | D |
|--|----------|--------|-------------|-------|
| TS1-740 Pole clamp, single (Ø 3"-3.5") | 147-0137 | 3-3.5" | 3.09 lbs | 76-89 |

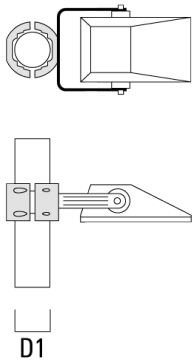


| | | | | |
|---|----------|-----------|----------|---------|
| TS1-740 Pole clamp, single (Ø 4.5"-5.25") | 147-6909 | 4.5-5.25" | 3.53 lbs | 114-133 |
|---|----------|-----------|----------|---------|

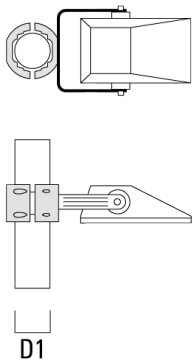


FLA740 LED

| Description | Part ID | D1 | Weight (lb) | D |
|--|----------|--------|-------------|---------|
| TS2-740 Pole clamp, double (Ø 4.0"-4.5") | 147-6906 | 4-4.5" | 3.53 lbs | 102-114 |

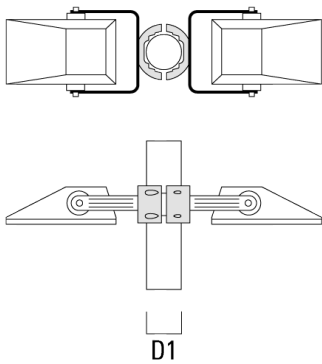


| | | | | |
|---|----------|-----------|----------|---------|
| TS2-740 Pole clamp, double (Ø 4.5"-5.25") | 147-6910 | 4.5-5.25" | 3.53 lbs | 114-133 |
|---|----------|-----------|----------|---------|

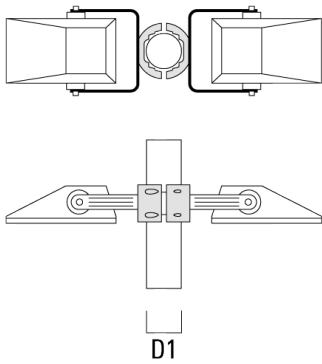

Surface Mount Canopy SMC

| Description | Part ID | D1 | D2 | M1 | Weight (lb) |
|-------------|----------|------|------|------|-------------|
| SMC-740 | 147-6914 | 9.06 | 7.68 | 0.47 | 6.0 lbs |



Optical Accessories

Light shield

| Description | Part ID | Additional information |
|-------------|----------|---|
| LS180-[A60] | 430-0038 | Light shield LS180 to greatly reduce or eliminate light pollution. PA injection moulded component, black matt. Suitable for asymmetric light distribution [A60]. |
| LS180 | 430-0029 | Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering. |