


Description

IP66, Class I. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG[®] Controlled Compression Gasket. PMMA main lens. The luminaire is factory sealed and does not need to be opened during installation. Integral EC converter. DALI. Factory installed LED circuit board. Removable LED boards for upgrading. CADoptimised OLC[®] One LED Concept optics for superior illumination and glare control.

Weight	5.60 kg			
Light distribution	rectangular, side throw [R65]			
Light source	LED-9/9W / 4000 K			
CRI	80			
Power supply	EC			
LEDs	9			
Rated input power	11 W			
Nominal Lumen (lm)				
LED Lumen	170			
Total Lumen	1530			
Tj	85			
Rated lumens (lm)				
LED Lumen	147.3			
Total Lumen	1326			
Та	25			

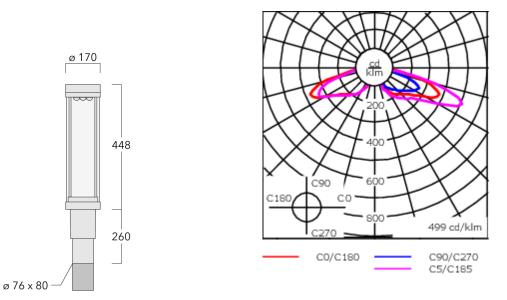

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	PMMA			
Colours	RAL9004 Signal black			
	RAL9006 White aluminium			
	RAL9007 Grey aluminium			
Gasket	Silicone CCG [®] Controlled Compression Gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)			
Ingress protection	IP66			
Impact resistance	IK09			
Corrosion resistance	5CE+Primer			
Windage	0.133 m ²			

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection.

115-1366





Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

115-1366

ZFT440 LED

Control

Eco Step Dim[®] Basic

Description	Part ID	
Eco Step Dim [®] Basic LED	430-0001	

Eco Step Dim[®] Advanced

Description	Part ID
Eco Step Dim [®] Advanced LED	430-0002

115-1366

ZFT440 LED

Mounting Accessories

Wall and pole brackets RZ

Description	Part ID	C1	D1	D2	D × L1	M1	Weight (kg)
RZ0-400 Wall bracket, single	115-1324	277	231	195	76 x 80	12	3.50
	D_2 O_2 O_2 O_2 O_2 O_2 O_2 O_2 O_2 D_1 D_1 M_1			— D x L	1		
Z2-400 Pole bracket, double	115-1323	258			76 x 100		4.90
			— D x	L1			

we-ef