



Description

IP44. Class I. IK10. Marine-grade, all aluminum construction. Anodized aluminum reflector. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gaskets. Prismatic polycarbonate lenses. Service door with fused cable connecting box. Factory-installed LED circuit board.

3-Sided Light Distribution [3 x 120° offset].

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

|                    |                          |
|--------------------|--------------------------|
| Weight             | 37.50 lb                 |
| Light distribution | three sided light output |
| Light source       | LED-FT-37W (4000K)       |
| CRI                | 80                       |
| Power supply       | electronic gear          |
| BUG                | B1 U3 G1                 |
| LEDs               | 1                        |
| Rated input power  | 42 W                     |

| Delivered lumens (lm) |        |
|-----------------------|--------|
| LED Lumen             | 2656.2 |
| Total Lumen           | 2656.2 |
| Ta                    | 25     |

| Nominal Lumen (lm) |      |
|--------------------|------|
| LED Lumen          | 6655 |
| Total Lumen        | 6655 |
| Tc                 | 25   |

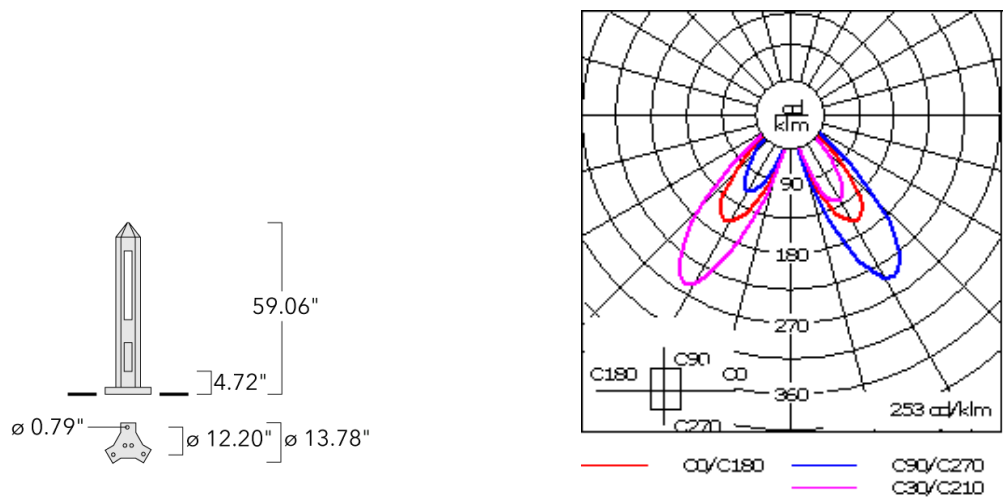

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, all-aluminium construction  |
| Lens                 | Prismatic polycarbonate lenses, 3 x 120° offset   |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS Polymer Coated Stainless Steel hardware   |
| Ingress protection   | IP44  |
| Impact resistance    | IK10  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |
| Power factor     | > 0.9   |
| Surge protection | In-line bracket 10kV Surge Protector  |

**Additional information**

|            |   |
|------------|---|
| Lifetime   | Ta=25°/40° L70B50 > 50000h  |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.                            |