





### Description

IP67, Class I. IK07. Stainless steel construction inground section. Die-cast hood with 30° angle made from marine-grade aluminium alloy avoids glare to passers-by and helps prevent accumulation of insects, leaves and debris on the lens. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Factory-sealed termination chamber complete with cable gland including spiral cable bending protection and 1.5 m of flexible PVC free cable.

The optional installation blockout is recommended for mounting. To be ordered separately.

Weight	10.40 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-24/24W / 350 mA - 4000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	26.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	170
Total Lumen	4080
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	118.7
Total Lumen	2848.3
T <sub>a</sub>	25

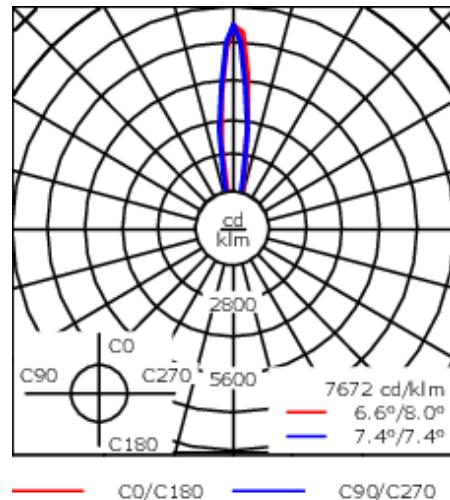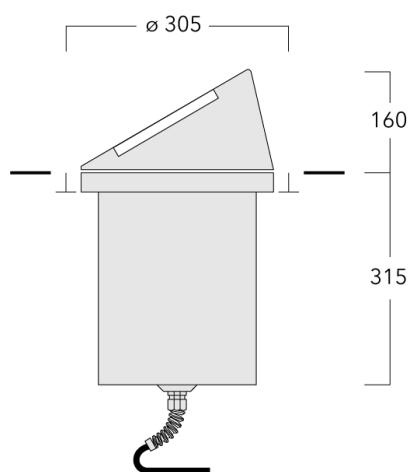

## Specifications

### Material description

Body	Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: black; border: 1px solid black;"></span>  RAL9004 Signal black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #c0c0c0; border: 1px solid black;"></span>  RAL9006 White aluminium       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #808080; border: 1px solid black;"></span>  RAL9007 Grey aluminium       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #333333; border: 1px solid black;"></span>  RAL7016 Anthracite grey       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #e0e0e0; border: 1px solid black;"></span>  RAL9016 Traffic white       </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK07
Corrosion resistance	5CE

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	6/6 kV

## **Additional information**

---

Lifetime Ta=25° L90B10 > 90000h


Energy efficiency class C-D (Light source)

---

## Mounting Accessories


### Installation breakout

Description	Part ID	D1	D2	H1	Weight(kg)	D	H
Breakout, Plastic	185-0323	300	325	420	2.50	300/325	420



### Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300



## Electrical Accessories

### Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

