

DOC110 LED [For Remodel]

**Description**

DOC110 LED for remodel projects. For new construction, see DOC110 LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.



A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|------------------------------|-----------------------------|
| Weight | 2.86 lb |
| Light distribution | symmetric, medium beam [M] |
| Light source | LED-6/12W / 700 mA - 3000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 6 |
| Rated input power | 14.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 290 |
| Total Lumen | 1740 |
| T _j | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 252 |
| Total Lumen | 1511.8 |
| T _a | 25 |

DOC110 LED [For Remodel]

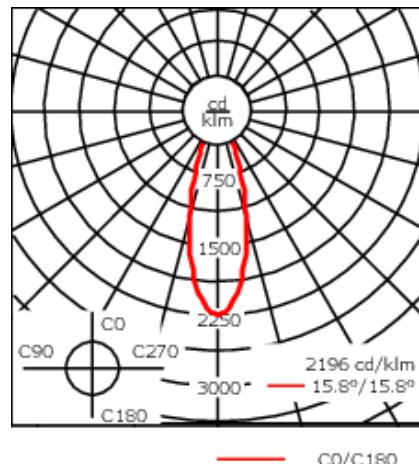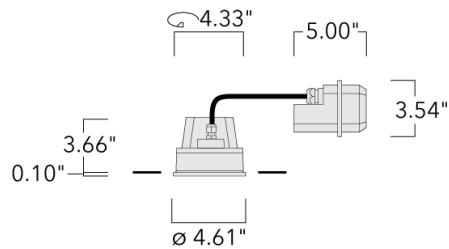**Specifications****Material description**

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colors | <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Black </div> <div style="text-align: center;"> RAL9007 Grey Metallic </div> <div style="text-align: center;"> RAL9016 White </div> <div style="text-align: center;"> RAL8019 Dark Bronze </div> </div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral 120-277V/0-10V dimming driver |
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |


DOC110 LED [For Remodel]**Additional information**

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

DOC110 LED [For Remodel]


Optical Accessories**Linear spread lens**

| Description | Part ID | C1 |
|-------------------|----------|------|
| IO-180-DOC110-LED | 134-1637 | 3.86 |



DOC110 LED [For Remodel]**Wallwash lens**

| Description | Part ID | C1 |
|------------------|----------|------|
| IO-20-DOC110-LED | 134-1683 | 3.85 |



DOC110 LED [For Remodel]**Mounting Accessories****Installation blockout**

| Description | Part ID | A | B | C1 | D1 |
|-------------------------------|----------|-------|------|------|------|
| Installation blockout BD011-I | 134-1639 | 13.11 | 9.13 | 6.77 | 4.60 |

