




Description

IP66, Class I. IK06. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG_R_ Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept.

Weight	2.40 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-6/18W / 1050 mA - 4000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	21 W
Nominal Lumen (lm)	
LED Lumen	450
Total Lumen	2700
T _j	85
Rated lumens (lm)	
LED Lumen	352.1
Total Lumen	2112.7
T _a	25

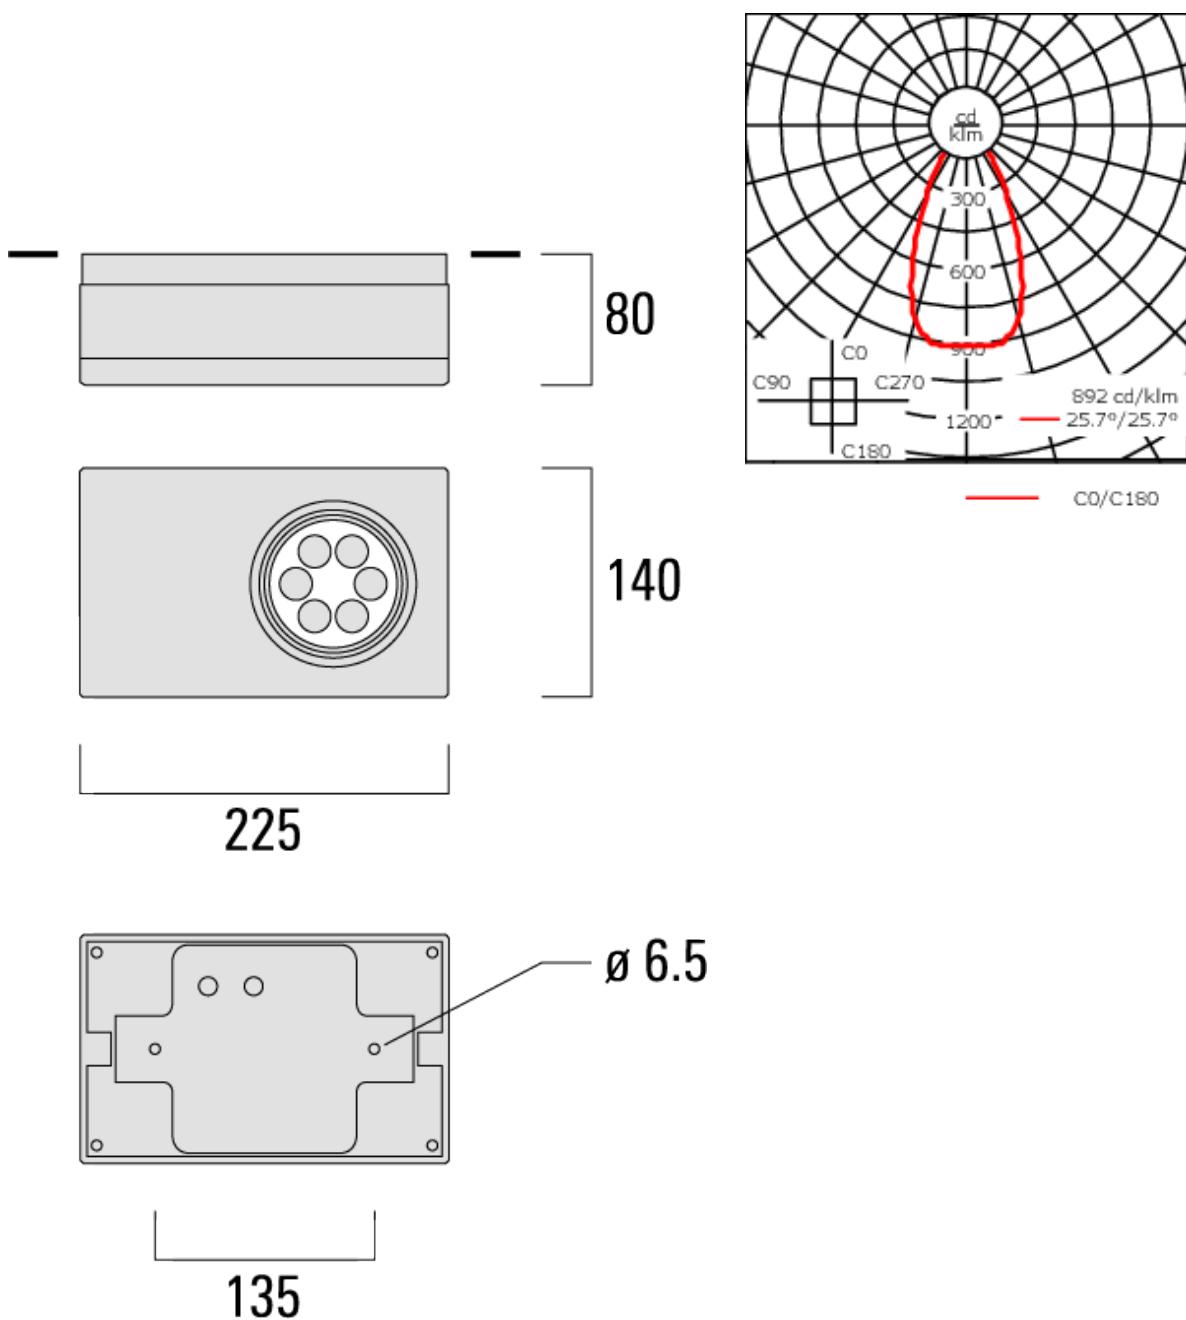

Specifications

Material description

Colours

-  RAL9004 Signal black
-  RAL9006 White aluminium
-  RAL9007 Grey aluminium
-  RAL9016 Traffic white

Corrosion resistance 5CE+Primer

Electrical description

Additional information