





Description

IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

|                    |  |
|--------------------|--|
| Weight             | 3.30 kg                                  |
| Light distribution | symmetric, medium beam up and down [M/M] |
| Light source       | LED-2x3/12W / 700 mA - 4000K             |
| CRI                | 80                                       |
| Power supply       | EC                                       |
| LEDs               | 6  |
| Rated input power  | 15 W                                     |
| Nominal Lumen (lm) |  |
| LED Lumen          | 310                                      |
| Total Lumen        | 1860                                     |
| Tj                 | 85                                       |
| Rated lumens (lm)  |  |
| LED Lumen          | 209                                      |
| Total Lumen        | 1254                                     |
| Ta                 | 25                                       |

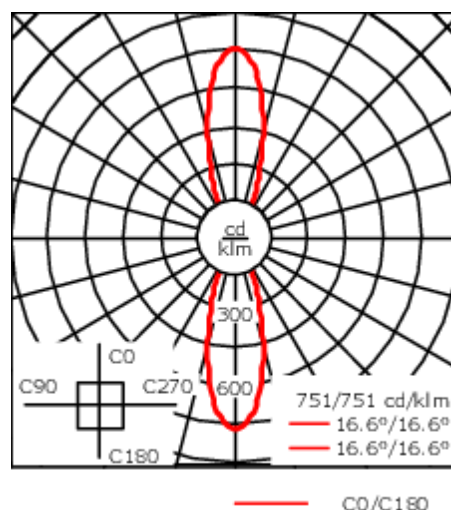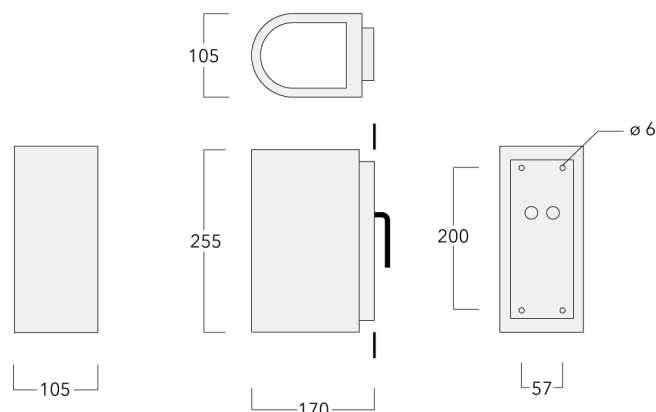

## Specifications

## Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Safety glass lens  |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |
| Ingress protection   | IP66   |
| Impact resistance    | IK07   |
| Corrosion resistance | 5CE+Primer   |

## Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |

### Additional information

|          |  |
|----------|--|
| Lifetime | Ta=40° L90B10 > 90000h   |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. |

**131-9489**

**SLS410 LED**

**we-ef**

## **Control**

### **1-10 V analogue dimming interface**

| Description                       | Part ID  | C  |
|-----------------------------------|----------|----|
| 1-10 V analogue dimming interface | 430-0011 | 90 |

#### **WE-EF LIGHTING Pty Ltd**

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499  
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 16/08/2025

Mounting Accessories

Column fitter

| Description | Part ID  | C1 | D1    | H1  | H2  | M1 | Weight (kg) |
|-------------|----------|----|-------|-----|-----|----|-------------|
| CF-410/420  | 131-9140 | 83 | ≥ 140 | 220 | 100 | 6  | 0.60        |

