

#### **Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.

Weight	10.80 lb
Light distribution	symmetric, narrow beam up and down [N/N]
Light source	LED-2x6/24W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	3240
Tj	85
Delivered lumens (lm)	
LED Lumen	203.9
Total Lumen	2447.1
Та	25

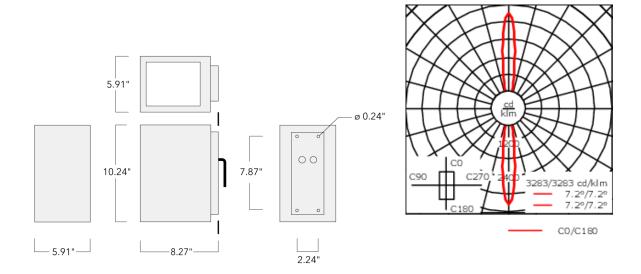

# **Specifications**

# **Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS hardware

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

#### **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Standard. Optional DALI version available. To be specified at time of ordering.

#### **Additional information**

Lifetime  $Ta=25^{\circ}/40^{\circ} L90B10 > 90000h$ 

BUG Rating Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.

Listings ETL listed. Suitable for wet locations.


#### **WE-EF LIGHTING USA, LLC**



# **Mounting Accessories**

# **Column fitter**

Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	≥ 5.51	8.66	3.94	0.24	1.32




# we-ef

## VLS420 LED

## **Surface Collar**

Description	Part ID	Α	В	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	ø1	ø1.5	Ø0.38	6	2



131-9339

VLS420 LED



# **Electrical Accessories**

# **Emergency Lighting Package**

Description	Part ID	Additional information
_LS420/430 LED Emergency Lighting	131-6900	Emergency battery backup operating for a minimum 90 minutes when power is lost.
Package		