




Description

IP55, Class I, IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. Polycarbonate prismatic lens. Silicone rubber gaskets.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

Weight	3.60 kg
Light distribution	360° symmetric distribution, diffused
Light source	LED-8W / 350 mA - 3000 K
CRI	85
Power supply	EC
BUG	B0 U3 G1
LEDs	1
Rated input power	10.4 W
Rated lumens (lm)	
LED Lumen	263.1
Total Lumen	263.1
Ta	25
Nominal Lumen (lm)	
LED Lumen	1360
Total Lumen	1360
Tc	25

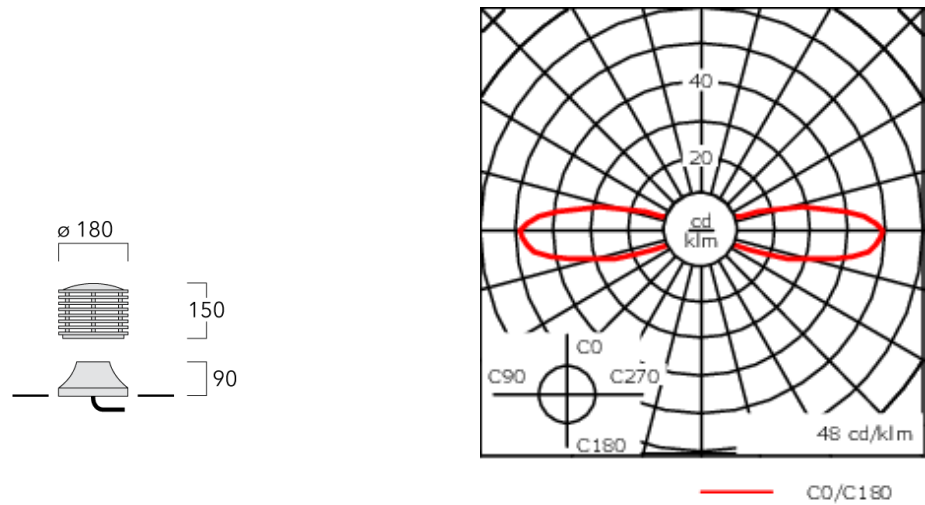

Specifications
Material description

Body	Marine-grade, all-aluminium construction
Lens	Polycarbonate prismatic lens
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone rubber gaskets
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25° L80B10 > 54000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare