




Description

IP55, Class I. IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. Borosilicate glass prismatic lens. Silicone rubber gaskets.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

Weight	10.60 kg
Light distribution	360° symmetric distribution, diffused
Light source	LED-12W / 350 mA - 3000 K
CRI	80
Power supply	EC
BUG	B0 U3 G1
LEDs	1
Rated input power	14.5 W
Rated lumens (lm)	
LED Lumen	463.1
Total Lumen	463.1
Ta	25
Nominal Lumen (lm)	
LED Lumen	1900
Total Lumen	1900
Tc	25

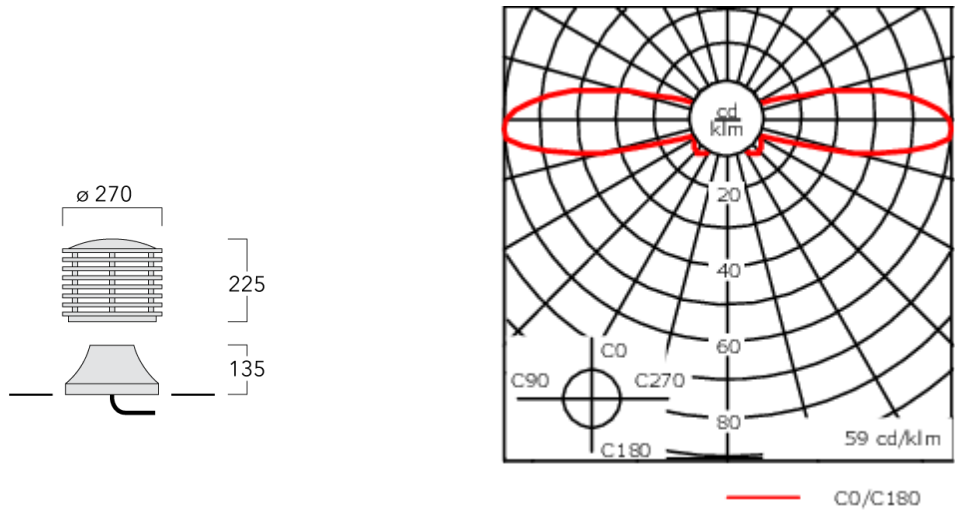

Specifications
Material description

Body	Marine-grade, all-aluminium construction
Lens	Borosilicate glass prismatic lens
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone rubber gaskets
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

Additional information

Lifetime	Ta=25° L80B10 > 54000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare

114-9624

XRX334 LED

we-ef

Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 16/08/2025