



Description

IP66, Class I. IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. PMMA lens. Silicone rubber gaskets.


Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

Weight	8.00 kg
Light distribution	360° symmetric distribution, shielded
Light source	LED-12W / 350 mA - 3000 K
CRI	80
Power supply	EC
BUG	B0 U1 G0
LEDs	1
Rated input power	14.3 W
Rated lumens (lm)	
LED Lumen	374.3
Total Lumen	374.3
Ta	25
Nominal Lumen (lm)	
LED Lumen	1900
Total Lumen	1900
Tc	25


115-9092

GRY234 LED

we-ef

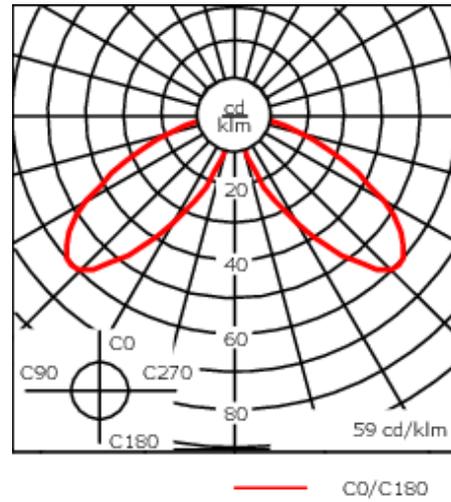


∅ 250

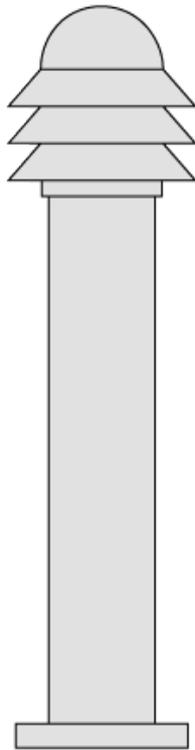

1000



9



∅ 202

∅ 230

Specifications**Material description**

Body	Marine-grade, all-aluminium construction
Lens	PMMA lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gaskets
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare
------------	--

Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0464-AP	220	190	60	102	400	350	8	200	50 x 100	5.50

