


STO134 LED Stainless Steel

**Description**

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

Pre-installation blockout is recommended for mounting in concrete, available on request.



Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	2.64 lb
Light distribution	diffused distribution
Light source	LED-5W / 250 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	5.6 W
Delivered lumens (lm)	
LED Lumen	78.6
Total Lumen	78.6
Ta	25
Nominal Lumen (lm)	
LED Lumen	750
Total Lumen	750
Tc	25

STO134 LED Stainless Steel

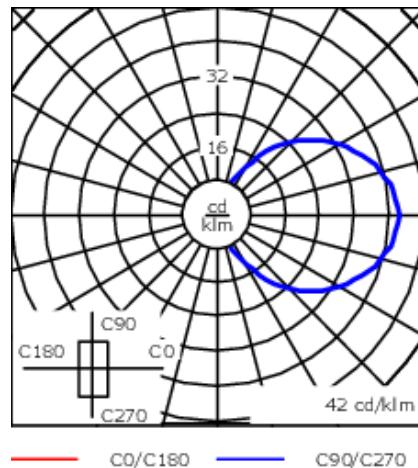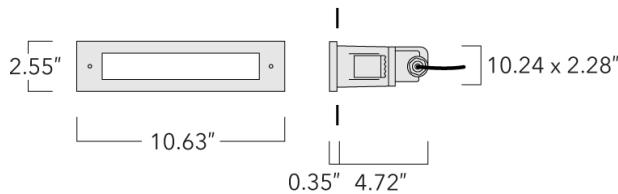**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colors	Stainless Steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information


Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

STO134 LED Stainless Steel

Mounting Accessories

Installation breakout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation breakout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98

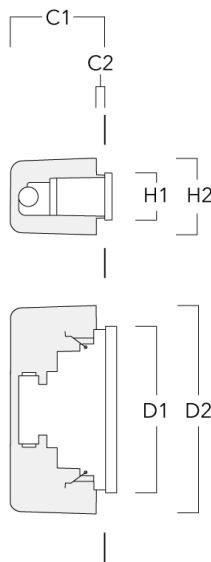

Installation breakout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

