



### Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Weight	0.90 kg
Light distribution	Shielded
Light source	LED-6W / 350 mA - 4000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
<b>Rated lumens (lm)</b>	
LED Lumen	19.8
Total Lumen	19.8
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	1110
Total Lumen	1110
Tc	25



**190-9018**

**SVL134 LED**

**we-ef**

**Additional information**

---

Lifetime Ta=25° L80B10 > 54000h

Energy efficiency class C (Light source)

---

**Fagerhult Lighting Ltd**

33-34 Dolben Street, SE1 0UQ London, United Kingdom


<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/11/2024


**Mounting Accessories**

**Installation blackout**

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (kg)
Installation blackout BST13-II	190-9031	145	22	270	280	338	65	75	107	0.90

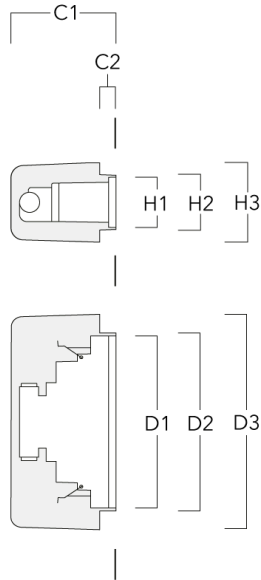

Installation blackout BST13-I	190-9030	130	12	270	338	65	107	0.90
-------------------------------	----------	-----	----	-----	-----	----	-----	------

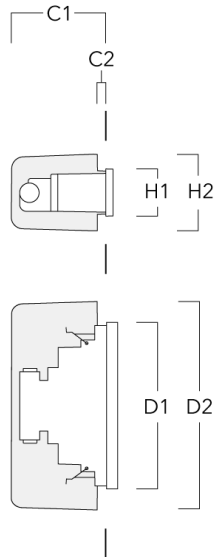

## Control

### DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90

#### Dali 2.0

- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!