

**Description**

Downward aimed shielded light source.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	1.98 lb
Light distribution	floor wash
Light source	LED-6W / 350 mA - 4000 K
CRI	80
Power supply	electronic gear
BUG	B0 U1 G0
LEDs	1
Rated input power	8 W

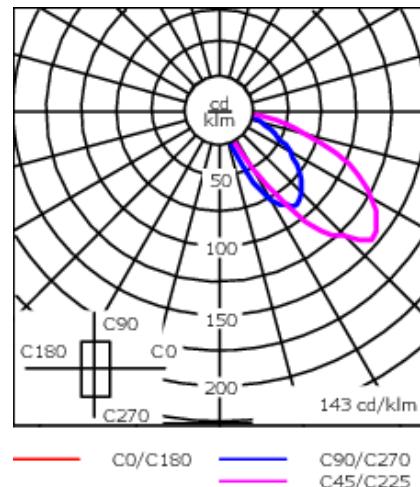
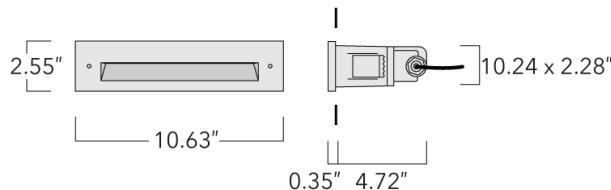
**Delivered lumens (lm)**

LED Lumen	180.7
Total Lumen	180.7
Ta	25

**Nominal Lumen (lm)**

LED Lumen	1110
Total Lumen	1110
Tc	25

## STI134 LED

**Specifications****Material description**

## Colors

- RAL9004 Black
- RAL9007 Grey Metallic
- RAL9016 White
- RAL8019 Dark Bronze

## Gasket

Silicone rubber gasket

## Fasteners

PCS Polymer Coated Stainless Steel Hardware

## Ingress protection

IP66

## Impact resistance

IK10

**Electrical description**

- |              |   |
|--------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
|--------------|---|

**Additional information**

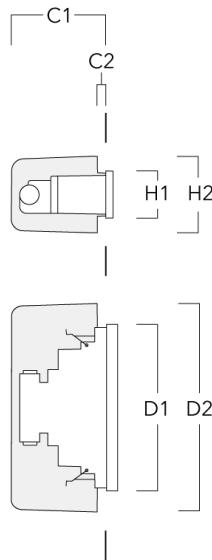
- |          |                            |
|----------|----------------------------|
| Lifetime | Ta=25°/40° L80B10 > 54000h |
|----------|----------------------------|

- |          |   |
|----------|---|
| Listings | ETL listed. Suitable for wet locations. |
|----------|---|

## Mounting Accessories

### Installation breakout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation breakout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98



Installation breakout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

