



Weight

## **Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. PMMA lens. Silicone CCG\_R\_Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC\_R\_One LED Concept.


symmetric, medium beam [M]
LED-12/36W / 1050 mA - 3000 K
80
EC
12
40 W
430
5160
85
360.4
4325.2
25

3.40 kg



1711 cd/klm 19.9º/19.9º

C0/C180

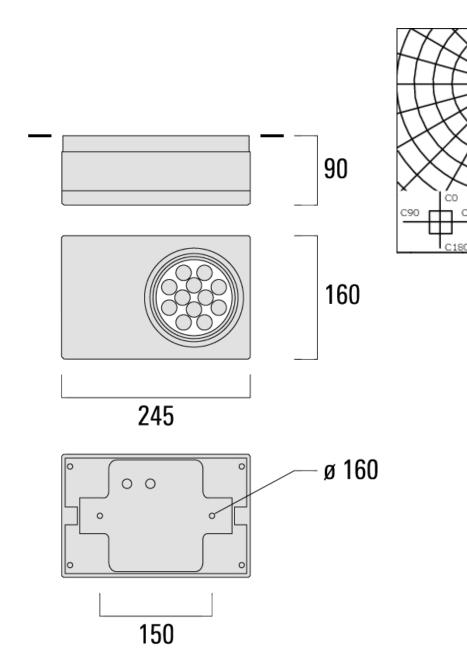

## **Specifications Material description**

Colours	RAL9004 Signal black RAL9006 White aluminium
	RAL9007 Grey aluminium
	RAL9016 Traffic white
Corrosion resistance	5CE+Primer

## **WE-EF LIGHTING Pty Ltd**

138-6007

SBI130 LED



## **Electrical description**

**Additional information**