



Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. PMMA lens. Silicone CCG_R_ Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept.


Weight	3.40 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-12/36W / 1050 mA - 4000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	40 W

Nominal Lumen (lm)

LED Lumen	450
Total Lumen	5400
T _j	85

Rated lumens (lm)

LED Lumen	357
Total Lumen	4283.6
T _a	25

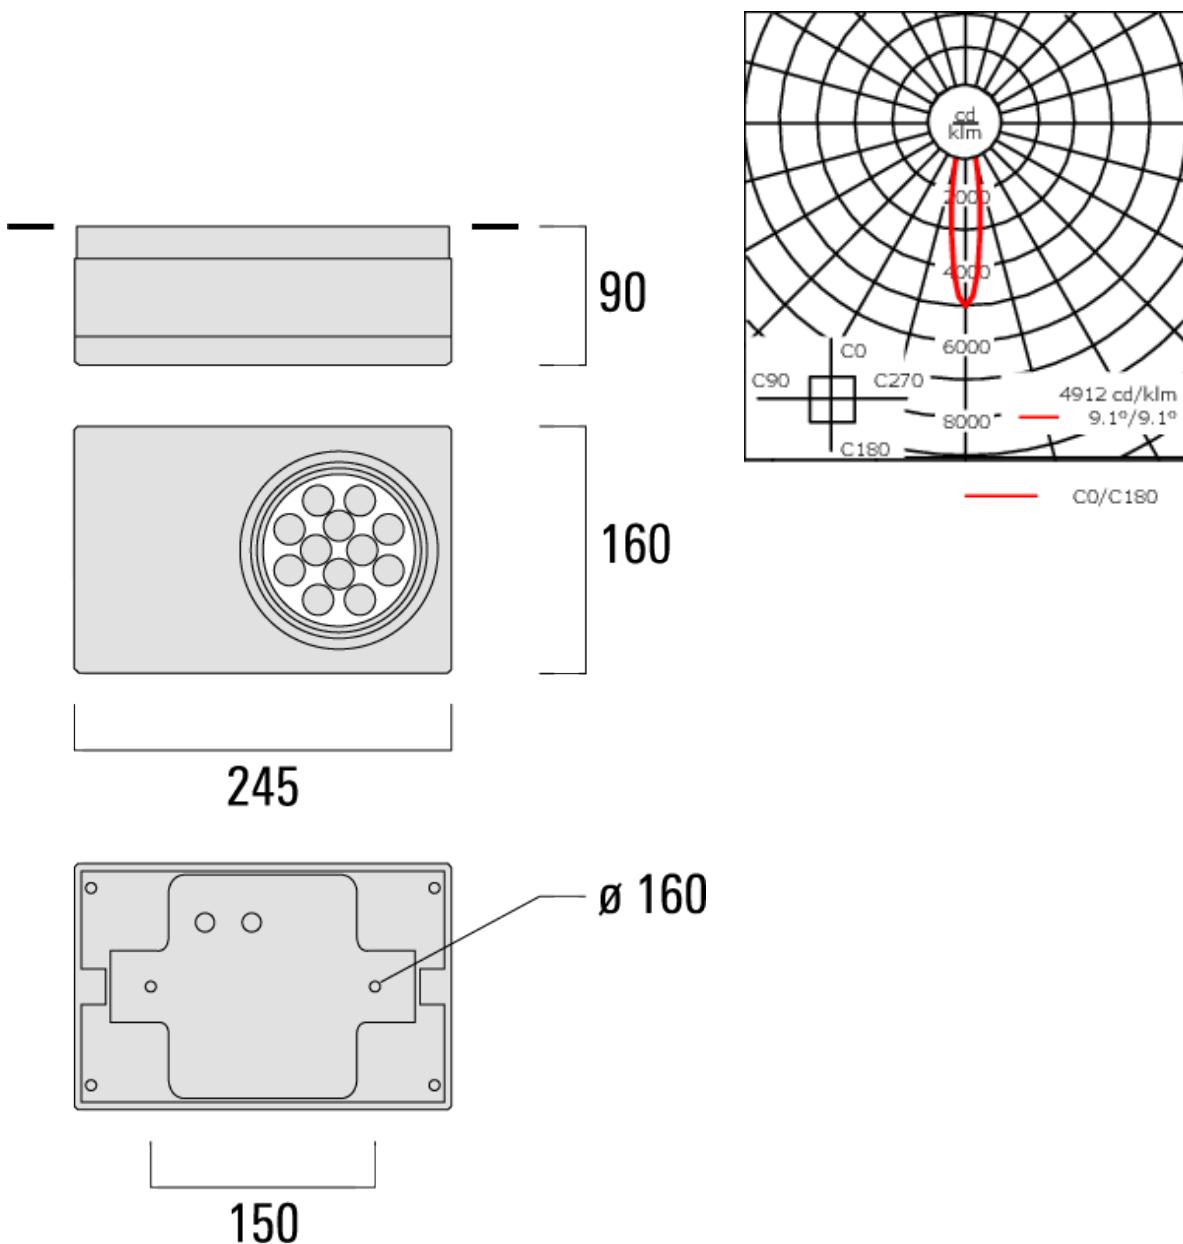

Specifications

Material description

Colours

- RAL9004 Signal black
- RAL9006 White aluminium
- RAL9007 Grey aluminium
- RAL9016 Traffic white

Corrosion resistance 5CE+Primer

138-6011

SBI130 LED

we-ef

Electrical description

Additional information