



Description


IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.


Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blockout is recommended for mounting in cast concrete ceilings, available on request.

Weight	5.20 kg			
Light distribution	symmetric, very narrow beam [EE]			
Light source	LED-24/72W / 1050 mA - 3000 K			
CRI	80			
Power supply	EC			
LEDs	24			
Rated input power	79 W			
Nominal Lumen (Im)				
LED Lumen	430			
Total Lumen	10320			
Tj	85			
Rated lumens (lm)				
LED Lumen	360.9			
Total Lumen	8662.6			
Та	25			



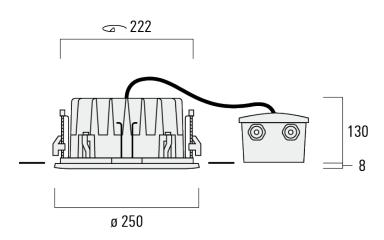

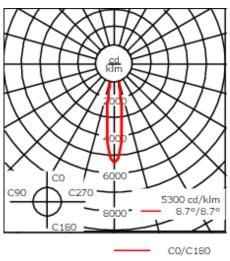

Specifications Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9007 Grey aluminium

RAL7016 Anthracite grey
RAL9016 Traffic white

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS hardware

Ingress protection IP66
Impact resistance IK08
Corrosion resistance 5CE

Electrical description

Driver / Ballast Integral EC electronic converter in thermally-separated compartment


WE-EF LIGHTING (Thailand) Co., Ltd.

135-9120

DOR140 LED



Additional information





Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011



Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1
Installation blockout BCR140-I	135-9115	385	315	167

