





**Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Luminaire can be mounted for up or down lighting.

|                           |  |
|---------------------------|--|
| Weight                    | 4.90 kg                                  |
| Light distribution        | symmetric, narrow beam up and down [E/E] |
| Light source              | LED-2x6/24W / 700 mA - 3000 K            |
| CRI                       | 80                                       |
| Power supply              | EC                                       |
| LEDs                      | 12                                       |
| Rated input power         | 27 W                                     |
| <b>Nominal Lumen (lm)</b> |  |
| LED Lumen                 | 290                                      |
| Total Lumen               | 3480                                     |
| Tj                        | 85                                       |
| <b>Rated lumens (lm)</b>  |  |
| LED Lumen                 | 219                                      |
| Total Lumen               | 2628.4                                   |
| Ta                        | 25                                       |

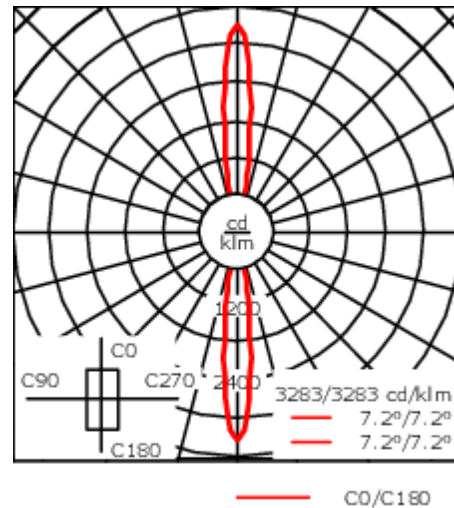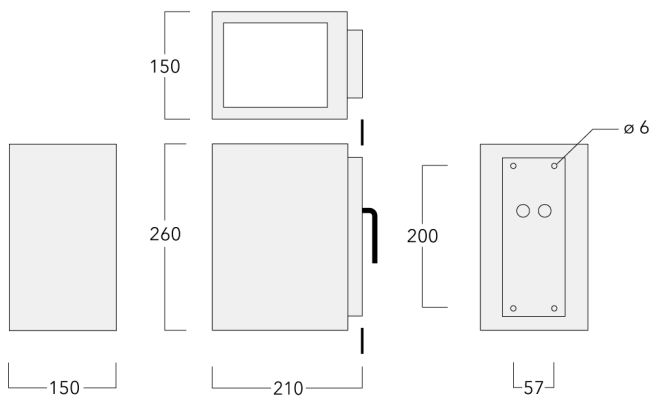

## Specifications

### Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, die-cast aluminium alloy  |
| Lens                 | Safety glass lens   |
| Colours              | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Signal black</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: grey; margin-right: 5px;"></div> <span>RAL9007 Grey aluminium</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: darkgrey; margin-right: 5px;"></div> <span>RAL7016 Anthracite grey</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: lightgrey; margin-right: 5px;"></div> <span>RAL9016 Traffic white</span> </div> |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS hardware  |
| Ingress protection   | IP66  |
| Impact resistance    | IK07  |
| Corrosion resistance | 5CE   |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 220-240V / 50-60 Hz              |
| Driver / Ballast | Integral EC electronic converter |

### Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
|----------|------------------------|

## Mounting Accessories

### Column fitter

| Description | Part ID  | C1 | D1    | H1  | H2  | M1 | Weight (kg) |
|-------------|----------|----|-------|-----|-----|----|-------------|
| CF-410/420  | 131-9140 | 83 | ≥ 140 | 220 | 100 | 6  | 0.60        |



**131-9165**

**VLS420 LED**

**we-ef**

## **Control**

### **1-10 V analogue dimming interface**

---

| Description                       | Part ID  | C  |
|-----------------------------------|----------|----|
| 1-10 V analogue dimming interface | 430-0011 | 90 |

---

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024