FLC230 LED COLOR CHANGER



Description

RGBW/RGBA Color Changer.

IP66. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands; one for power, one for DMX. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. DMX interface.

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Weight	17.00 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-4x6/42W - RGBW/4K
CRI	20/80
Power supply	electronic gear
LEDs	6
Rated input power	44 W
Nominal Lumen (lm)	
LED Lumen	495
Total Lumen	2970
Tj	85
Delivered lumens (lm)	
LED Lumen	428.9
Total Lumen	2573.3
Та	25


FLC230 LED COLOR CHANGER

we-ef

Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

FLC230 LED COLOR CHANGER

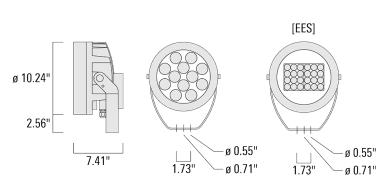



Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

PCS Polymer Coated Stainless Steel Hardware **Fasteners**

Ingress protection IP66 Impact resistance IK07

Corrosion resistance 5CE superior corrosion protection system

Windage 0.684



FLC230 LED COLOR CHANGER

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V.

Driver / Ballast Integral EC electronic converter with DMX Interface

Power factor > 0.9

Surge protection Integral 10kV Surge Protector

Additional information

Lifetime	$Ta=25^{\circ}/40^{\circ} L90B10 > 90000h$
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration


Rating for Bridge and Overpass Applications.

FLC230 LED COLOR CHANGER


Mounting Accessories

Floodlight mounting bracket TA


Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA1 Mounting bracket, single (Ø 4.25	147-0096		5.12	4.25 x 8	4.25	16.53	108 x 200
x 8)							




TA2 Mounting bracket, double (Ø	147-0097	5.12	4.25 x 8 4.25	16.53	108 x 200	
4.25 x 8)						




Description	Part ID	А	C1	D × L1	L	Weight (lb)	D×S
TA2-L Mounting bracket, double (Ø	147-0148	±90°	16.54	4.25 x 8	4.25	44.53	108 x 200
4.25 x 8)							




TA2-L Mounting bracket, double (Ø 3	147-0105	±90° 16.54	3 x 8	2.99 35.49	76 x 200	
x 8)						




Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA3 Mounting bracket, triple (Ø 3.50	147-0025	±90°	25.59	3.50 x 8	3.5	39.46	89 x 200
x 8)							




TA3 Mounting bracket, triple (Ø 4.25	147-0098	±90°	25.59"	4.25 x 8	53.35 lbs	108 x 200
x 8)						




Description	Part ID	Α	C1	D × L1	L	Weight (lb)	D×S
TA4 Mounting bracket, quad (Ø 3.50	147-0099	±90°	25.59	3.50 x 8		45.86 lbs	89 x 200
x 8)							






TA4 Mounting bracket, quad (Ø 4.25	147-0100	±90° 2	25.59 4	.25 x 8 53.0	0 108 x 200
x 8)					




FLC230 LED COLOR CHANGER

Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA2 Mounting bracket, double (Ø 3 x	147-0024		5.12	3 x 8	2.99	4.2 lbs	76 x 200
8)							




TA1 Mounting bracket, single (Ø 3 x	147-0023	5.12	3 x 8	2.99 4.1	9 76 x 200
8)					



FLC230 LED COLOR CHANGER

Pole clamp TS


Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0526	4.0-4.50	3.53	102-114
4.0"-4.5")				




TS1-2/M12 Pole clamp, single (Ø	147-0544	114-133	3.75	114-133
4.5"-5.25")				




Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0543	3.0-3.50	3.31	76-89
3"-3.5")				



TS2-2/M12 Pole clamp, double (Ø	147-0545	3.0"-3.5"	3.09 lbs	76-89
3"-3 5")				




Description	Part ID	D1	Weight (lb)	D
TS2-2/M16 Pole clamp, double (Ø 4.5"-5.25")	147-0546	4.50-5.25	3.53	114-133



Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.54




FLC230 LED COLOR CHANGER


we-ef

Pole top caps KF

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-60/M16 Spigot Cap (Ø 2.36")	310-9120	2.36	2.36 x 4	4.4 lbs	60 x 100




KF16-76/M16 Spigot Cap (Ø 3.0")	310-9121	3	3 x 4	1.10 lbs	76 x 100






FLC230 LED COLOR CHANGER

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-89/M16 Spigot Cap (Ø 3.5")	300-0734	3.50	3.5 x 3	1.10 lbs	89




KF16-108/M16 Spigot Cap (Ø 4.25") 300-0735 4.25 4.25 x 3 4.4 lbs 108




FLC230 LED COLOR CHANGER

Short post EM

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-M16 AL	270-0001	6.3"	5.12"	8"	0.35"	4.85 lbs




Surface Mount Canopy SMC




FLC230 LED COLOR CHANGER

Pole clamp PC


Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (Ø	139-2703	3.0-3.50	2.20
3"-3.5")			



PC1 76-89/60 Pole clamp, single (Ø	139-2702	3.0-3.50	2.20
3"-3 5")			



Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double	139-2707	4.0-4.50	2.65
(Ø 4"-4.5")			




PC1 102-114/60 Pole clamp, single (Ø 4"-4,5")


139-2706

4.0-4.50

2.65



Description	Part ID	D1	Weight (lb)
PC2 114-133/60 Pole clamp, double	139-2709	4.5-5.25	3.10
(Ø 4.5"-5.25")			




PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")

139-2708


4.5-5.25

3.10






Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double	139-2705	3.20-4.30	2.40
(Ø 3.25"-4.25")			




PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")

139-2704

3.20-4.30 2.40





FLC230 LED COLOR CHANGER

we-ef

Optical Accessories

Glare shield

Description	Part ID	Α	C1
ES-FLC230-LED	139-1852	6.26	10.47



ES-FLC230-CC-LED	420 /070	/ 20	10.47
FX_FI(/ 3()_((_1 FI)	139-6970	679	111/1/
LJ-I LCZJU-CC-LLU	137-0770	U.Z /	10.47






FLC230 LED COLOR CHANGER

Snoot

Description	Part ID	Α	C1
ET-FLC230-LED	139-1853	6.3	10.47





FLC230 LED COLOR CHANGER

Linear spread lens

Description	Part ID	C1		
IO-180-FLC230-LED	139-1849	7.80		



Softening Lens

scription Part ID	C1
-360-FLC230-LED 139-1850	7.80






FLC230 LED COLOR CHANGER

Wallwash lens

Description	Part ID	C1
IO-20-FLC230-LED	139-1848	7.83





FLC230 LED COLOR CHANGER

Control

DMX Controller

Description	Part ID
DMX Controller	400-0469

DMX Controller (smart)

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via





FLC230 LED COLOR CHANGER

DMX Booster Box

Description	Part ID	
DMX Booster Box	400-0474	



DMX Termination Plug

Description	Part ID	
DMX Termination Plug	400-0475	



we-ef

FLC230 LED COLOR CHANGER

DMX Plug and Socket

Description	Part ID
DMX Plug and Socket	400-0479



DMX Combination Cable

Description	Part ID	
DMX Combination Cable	400-0480	





DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



DMX Wireless Transceiver

Description	Part ID	
DMX Wireless Transceiver	400-0476	

