


## Tapered Curved - Galvanised Steel

Tubular steel, tapered, curved. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

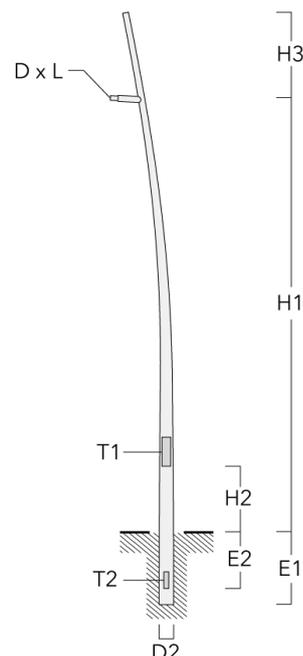

Description	Référence	D1	D2	DxL1	E1	E2	H1	H2	H3	Spigot	T1	T2	Weight
AM-V 40	240-1149	42	157	42 x 100	800	500	4000	600	1000	Ø 42 x 100	90 x 400	50 x 150	84
AM-V 40	240-1150	60	157	60 x 100	800	500	4000	600	1000	Ø 60 x 100	90 x 400	50 x 150	84
AM-V 60	240-1151	42	191	42 x 100	1000	500	6000	600	1000	Ø 42 x 100	90 x 400	50 x 150	119
AM-V 60	240-1152	60	191	60 x 100	1000	500	6000	600	1000	Ø 60 x 100	90 x 400	50 x 150	119
AM-V 80	240-1153	42	223	42 x 100	1300	500	8000	600	1000	Ø 42 x 100	90 x 400	50 x 150	162
AM-V 80	240-1154	60	223	60 x 100	1300	500	8000	600	1000	Ø 60 x 100	90 x 400	50 x 150	162