


Tapered - Galvanised Steel

Tubular steel, tapered. Hot dipped galvanised inside and out. Standard version with planted root and cable entry hole. One, two or three service doors, depending on application. Poles are supplied in two sections for nominal heights of 16 m or above. Optional climbing rungs from 3 m above ground are available at additional charge.

The maximum windage area is dependant on location.
The maximum permissible number of floodlights require individual calculations.

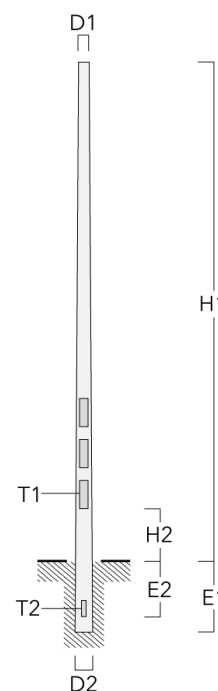


Description	Part ID	D1	D2	E1	E2	H1	H2	Spigot	T1	T2	Weight
FM-K 10	260-0001	108	223	1500	500	10000	500	Ø 18	1 x 90 x 400	50 x 150	189
FM-K 10	260-0003	108	223	1500	500	10000	500	Ø 18	2 x 90 x 400	50 x 150	189
FM-K 12	260-0055	76	211	1500	500	12000	500	Ø 76	1 x 90 x 400	50 x 150	198
FM-K 12	260-0056	89	223	1500	500	12000	500	Ø 89	1 x 90 x 400	50 x 150	221
FM-K 12	260-0004	108	243	1500	500	12000	500	Ø 18	1 x 90 x 400	50 x 150	247
FM-K 12	260-0008	108	243	1500	500	12000	500	Ø 18	2 x 90 x 400	50 x 150	247
FM-K 16	260-0146	108	283	1500	500	16000	500	Ø 18	1 x 140 x 600	50 x 150	373
FM-K 16	260-0147	108	283	1500	500	16000	500	Ø 18	2 x 140 x 600	50 x 150	373
FM-K 18	260-0018	108	303	1500	500	18000	500	Ø 18	1 x 140 x 600	50 x 150	425
FM-K 18	260-0019	108	303	1500	500	18000	500	Ø 18	2 x 140 x 600	50 x 150	425
FM-K 18	260-0021	108	303	1500	500	18000	500	Ø 18	3 x 140 x 600	50 x 150	462


Mounting Accessories

KSM Anti corrosion sleeve

Description	Part ID	D2	H1
Anti corrosion sleeve KSM100	300-0790	89-114	450

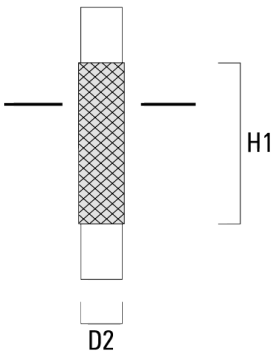


Anti corrosion sleeve KSM115	300-0321	120	450
------------------------------	----------	-----	-----

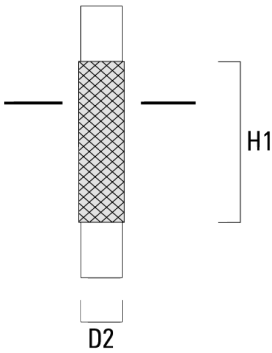


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM125	300-0791	133-140	450

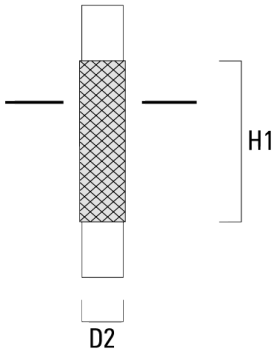


Anti corrosion sleeve KSM160	300-0325	152-168	450
------------------------------	----------	---------	-----

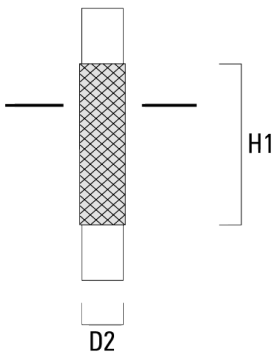


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM200	300-0329	168-219	450

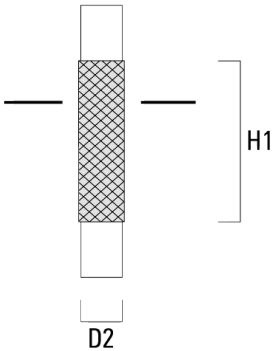


Anti corrosion sleeve KSM230	300-0331	220-230	450
------------------------------	----------	---------	-----

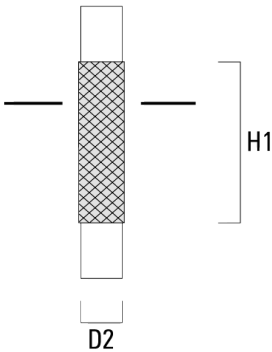


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM315	300-1019	290-340	450

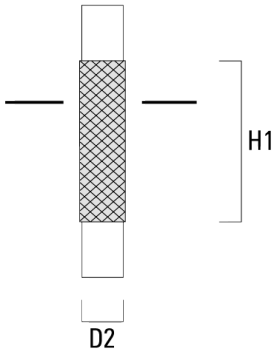

KST Cable protection


Description	Part ID	T1
Cable protection KST150	300-0323	50 x 150




Electrical Accessories

SD Socket

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 76)	405-0025	95	70	76	0.35

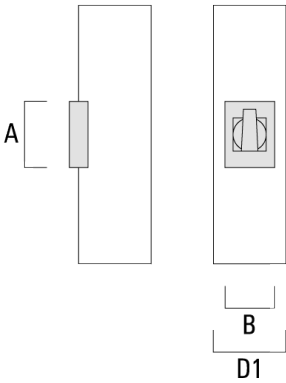


Socket SD1 (Ø 89)	405-0026	95	70	89	0.35
-------------------	----------	----	----	----	------

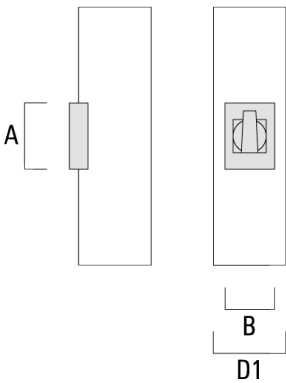


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 108)	405-0028	95	70	108	0.35

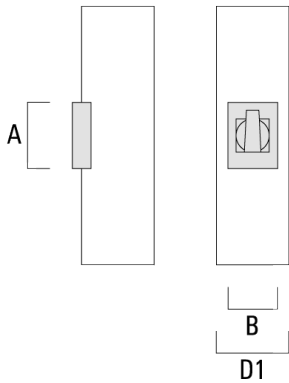


Socket SD1 (Ø 133)	405-0033	95	70	133	0.35
--------------------	----------	----	----	-----	------

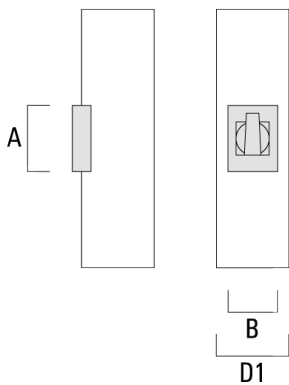


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 160)	405-0035	95	70	160	0.35

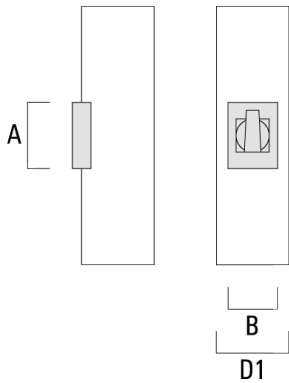


SD10, ~230V/16,00 A - CEE (Ø 108)	405-0032	95	70	108	0.35
-----------------------------------	----------	----	----	-----	------

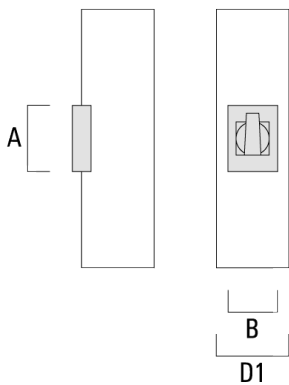


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
SD10, ~230V/16,00 A - CEE (Ø 160)	405-0088	95	70	160	0.35

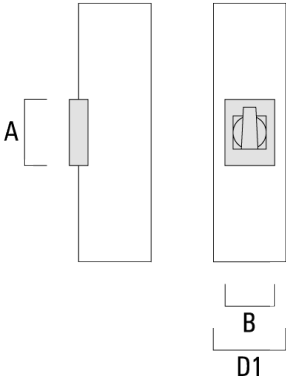


EK Connecting box

Description	Part ID	A	B	C1
Connecting box EK70	405-0078	160	58	57



Tapered - Galvanised Steel

Description	Part ID	A	B	C1
Connecting box EK80	405-0112	235	78	65



Connecting box EK82	405-0113	275	84	72
---------------------	----------	-----	----	----

