


Constant - Wood and Galvanised Steel

Impregnated hardwood top section with anodised aluminium core structure. Galvanised steel base section. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting flange plate with die-cast aluminium cover to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

Natural wood is susceptible to colour and texture variations over time. It is recommended to use a suitable wood stain once a year for protection.

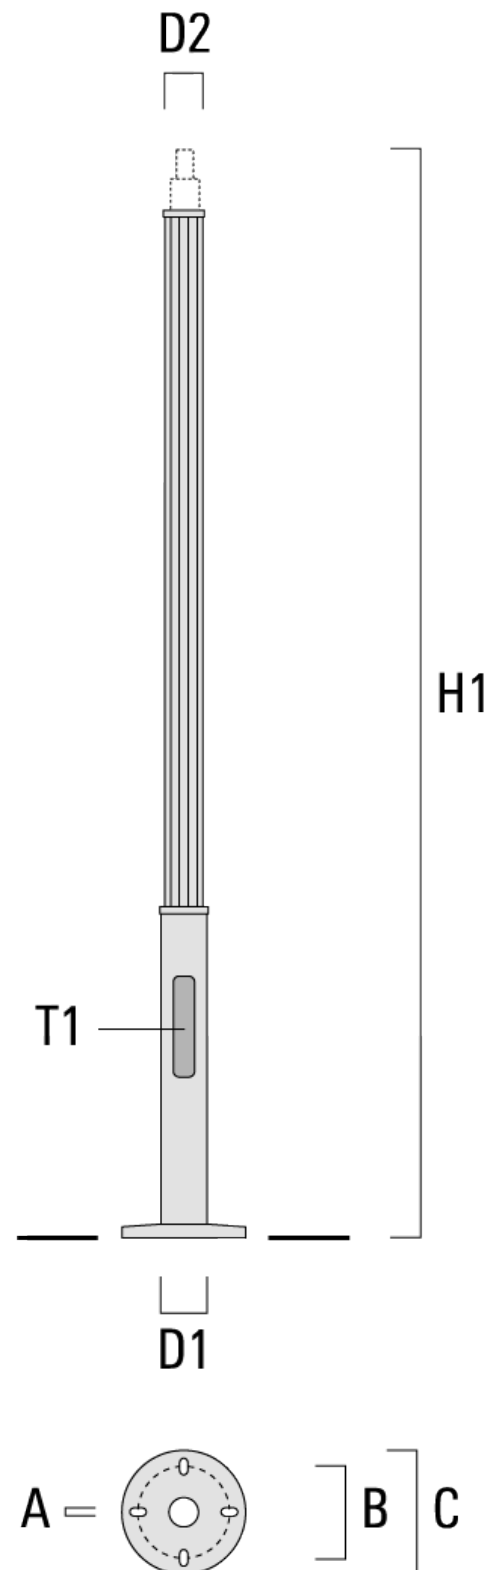

Constant - Wood and Galvanised Steel

Description	Part ID	D1	B	C	H1	A	T1	Weight
AMW-C 25 140	270-9268	140	244-293	365	2500	20	90 x 400	50.00
AMW-C 30 140	270-9269	140	244-293	365	3000	20	90 x 400	55.00
AMW-C 35 140	270-9270	140	244-293	365	3500	20	90 x 400	62.00
AMW-C 40 140	270-9272	140	244-293	365	4000	20	90 x 400	67.00
AMW-C 45 140	270-9275	140	244-293	365	4500	20	90 x 400	73.00
AMW-C 50 140	270-9276	140	244-293	365	5000	20	90 x 400	79.00
AMW-C 55 140	270-9280	140	244-293	365	5500	20	90 x 400	86.00

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV6	300-0457-AP	305	270	106	140	606	506	16	200	50 x 100	18.10

