


Constant - Galvanised Steel

Tubular steel, constant section, hot dipped galvanised. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting flange plate with die-cast aluminium cover to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

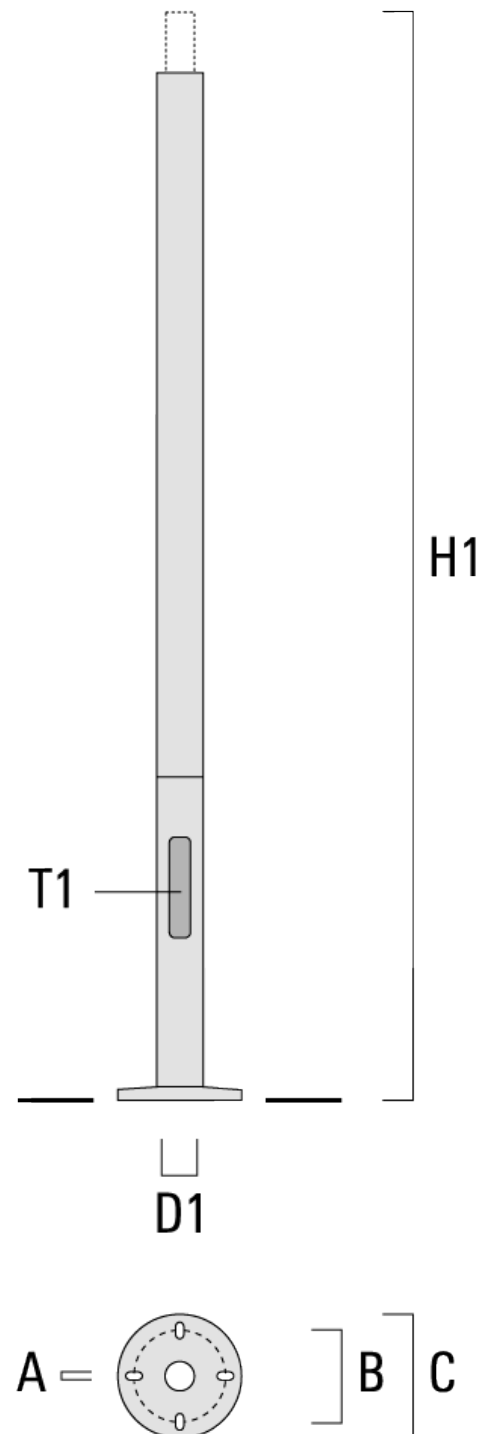

Constant - Galvanised Steel

Description	Part ID	D1	B	C	H1	A	T1	Weight
AMF-C 25 114	270-9333	114	244-293	365	2500	20	70 x 400	41.00
AMF-C 30 114	270-9334	114	244-293	365	3000	20	70 x 400	45.00
AMF-C 35 114	270-9335	114	244-293	365	3500	20	70 x 400	50.00
AMF-C 40 114	270-9336	114	244-293	365	4000	20	70 x 400	58.00
AMF-C 45 114	270-9337	114	244-293	365	4500	20	70 x 400	61.00
AMF-C 50 114	270-9338	114	244-293	365	5000	20	70 x 400	66.00
AMF-C 55 114	270-9339	114	244-293	365	5500	20	70 x 400	70.00
AMF-C 25 140	270-9283	140	244-293	365	2500	20	90 x 400	57.50
AMF-C 30 140	270-9284	140	244-293	365	3000	20	90 x 400	65.50
AMF-C 35 140	270-9285	140	244-293	365	3500	20	90 x 400	72.50
AMF-C 40 140	270-9286	140	244-293	365	4000	20	90 x 400	87.00
AMF-C 45 140	270-9287	140	244-293	365	4500	20	90 x 400	94.50
AMF-C 50 140	270-9288	140	244-293	365	5000	20	90 x 400	102.00
AMF-C 55 140	270-9289	140	244-293	365	5500	20	90 x 400	111.50

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV6	300-0457-AP	305	270	106	140	606	506	16	200	50 x 100	18.10

