


Stepped - Galvanised Steel

Tubular steel, stepped, hot dipped galvanised. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting flange plate with die-cast aluminium cover to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

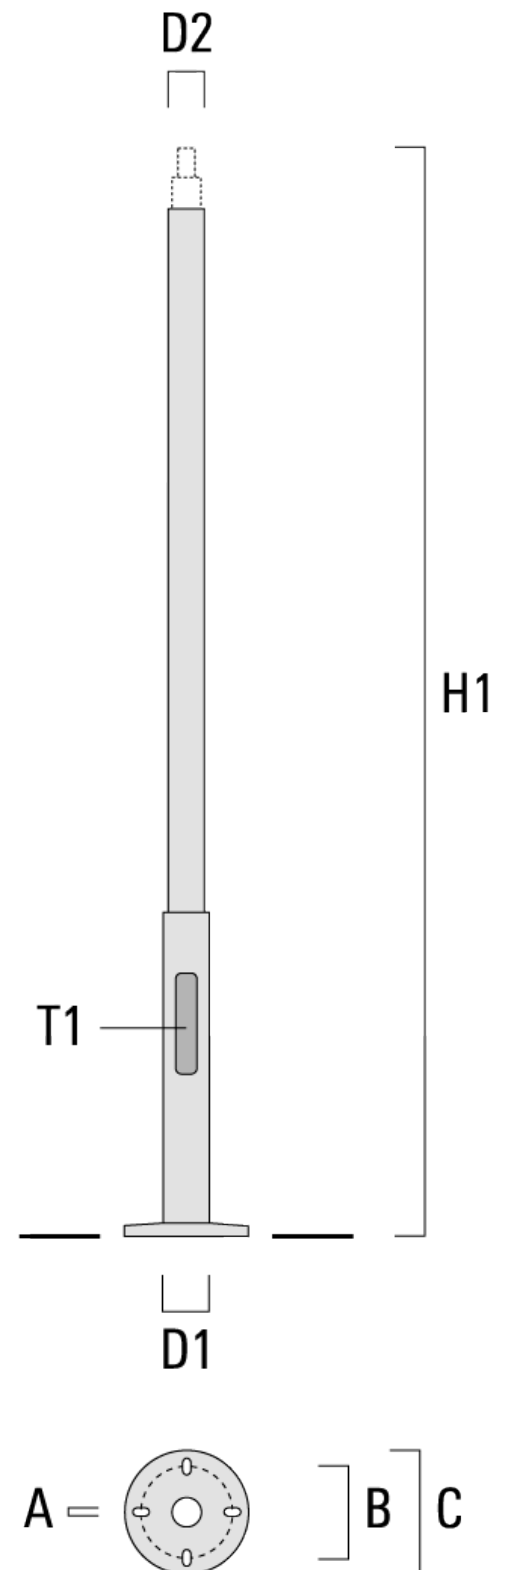


Stepped - Galvanised Steel

Description	Part ID	D1	D2	B	C	H1	A	T1	Weight
AMF-S 25 140-76	270-9290	140	76	244-293	365	2500	20	90 x 400	54.00
AMF-S 30 140-76	270-9291	140	76	244-293	365	3000	20	90 x 400	56.50
AMF-S 35 140-76	270-9292	140	76	244-293	365	3500	20	90 x 400	62.00
AMF-S 40 140-76	270-9293	140	76	244-293	365	4000	20	90 x 400	64.50
AMF-S 45 140-76	270-9294	140	76	244-293	365	4500	20	90 x 400	67.00
AMF-S 50 140-76	270-9295	140	76	244-293	365	5000	20	90 x 400	69.50
AMF-S 55 140-76	270-9296	140	76	244-293	365	5500	20	90 x 400	72.00
AMF-S 25 140-114	270-9325	140	114	244-293	365	2500	20	90 x 400	54.00
AMF-S 30 140-114	270-9326	140	114	244-293	365	3000	20	90 x 400	56.50
AMF-S 35 140-114	270-9327	140	114	244-293	365	3500	20	90 x 400	62.00
AMF-S 40 140-114	270-9328	140	114	244-293	365	4000	20	90 x 400	64.50
AMF-S 45 140-114	270-9329	140	114	244-293	365	4500	20	90 x 400	67.00
AMF-S 50 140-114	270-9330	140	114	244-293	365	5000	20	90 x 400	69.50
AMF-S 55 140-114	270-9331	140	114	244-293	365	5500	20	90 x 400	72.00
AMF-S 60 165-114	270-9320	165	114	300-353	425	6000	24	90 x 400	136.00
AMF-S 65 165-114	270-9321	165	114	300-353	425	6500	24	90 x 400	140.00
AMF-S 70 165-114	270-9322	165	114	300-353	425	7000	24	90 x 400	144.00
AMF-S 75 165-114	270-9323	165	114	300-353	425	7500	24	90 x 400	148.00
AMF-S 80 165-114	270-9324	165	114	300-353	425	8000	24	90 x 400	152.00
AMF-S 60 165-140	270-9299	165	140	300-353	425	6000	24	90 x 400	143.50
AMF-S 65 165-140	270-9300	165	140	300-353	425	6500	24	90 x 400	151.00
AMF-S 70 165-140	270-9301	165	140	300-353	425	7000	24	90 x 400	169.00
AMF-S 75 165-140	270-9302	165	140	300-353	425	7500	24	90 x 400	176.50
AMF-S 80 165-140	270-9303	165	140	300-353	425	8000	24	90 x 400	184.00

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV10	300-9108	415	325	153	166	1020	495	20	200	50 x 100	47.00

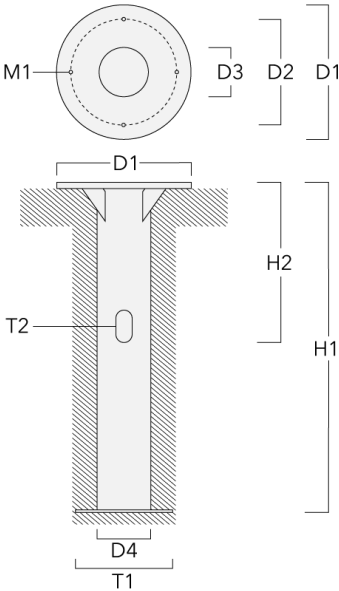

Planted root ESV6	300-0457-AP	305	270	106	140	606	506	16	200	50 x 100	18.10
-------------------	-------------	-----	-----	-----	-----	-----	-----	----	-----	----------	-------

