


Constant - Aluminium

Tubular aluminium, constant section. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting die-cast aluminium base with covers to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

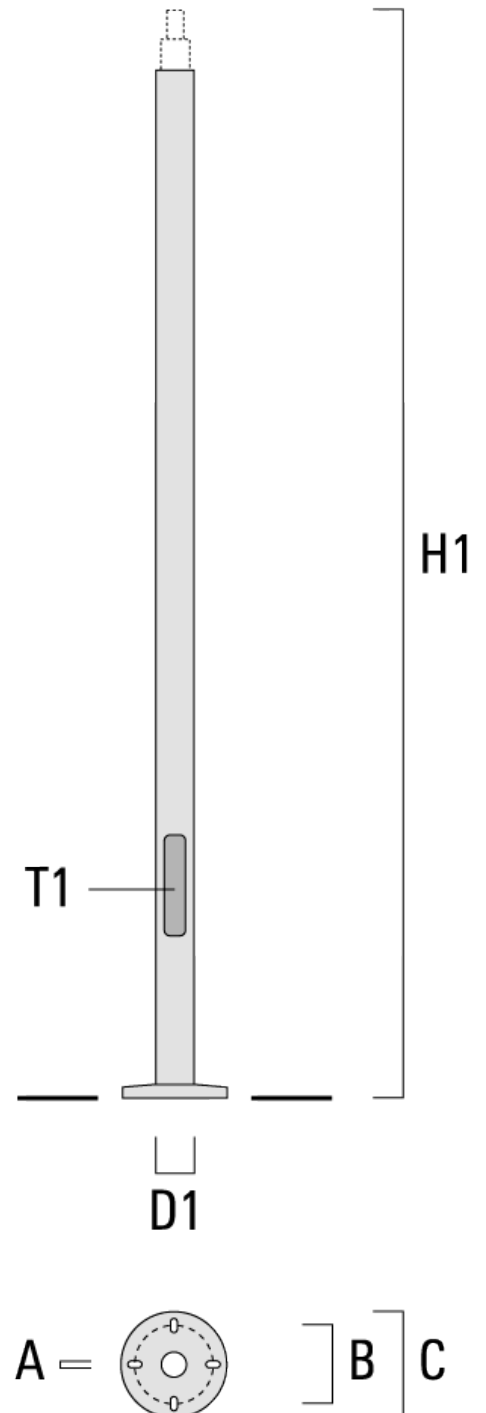

Constant - Aluminium

Description	Part ID	D1	B	C	H1	A	T1	Weight
AML-C 20 100	270-9041	100	177-217	295	2000	18.50	75 x 200	11.50
AML-C 25 100	270-9042	100	177-217	295	2500	18.50	75 x 200	12.50
AML-C 30 100	270-9044	100	177-217	295	3000	18.50	75 x 200	13.50
AML-C 25 140	270-9040	140	244-293	365	2500	18.50	90 x 400	22.50
AML-C 30 140	270-9043	140	244-293	365	3000	18.50	90 x 400	25.00
AML-C 35 140	270-9045	140	244-293	365	3500	18.50	90 x 400	27.50

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV6	300-0824-AP	240	200	107	140	600	500	16	200	50 x 100	18.00

