


Stepped - Aluminium

Tubular aluminium, stepped. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting die-cast aluminium base with covers to conceal mounting hardware. Service door.

Planted root is available depending on site-specific requirements; to be ordered separately.

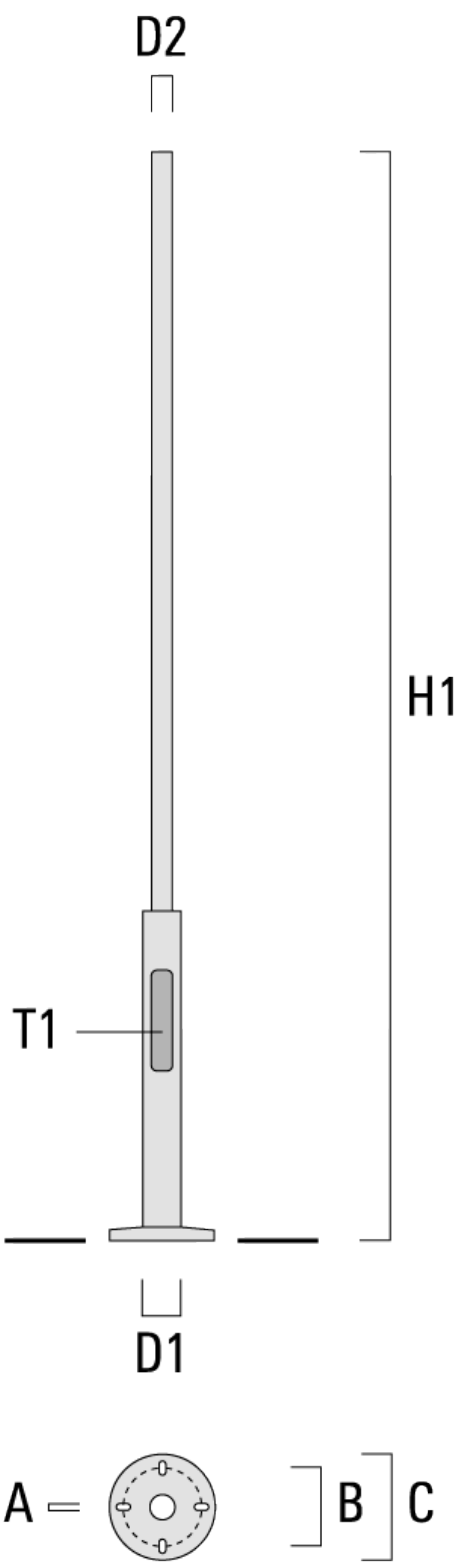

Stepped - Aluminium

Description	Part ID	D1	D2	B	C	H1	A	T1	Weight
AML-S 25 140-76	270-9060	140	76	244-293	365	2500	18.50	90 x 400	23.00
AML-S 30 140-76	270-9061	140	76	244-293	365	3000	18.50	90 x 400	24.50
AML-S 35 140-76	270-9062	140	76	244-293	365	3500	18.50	90 x 400	26.50
AML-S 40 140-76	270-9063	140	76	244-293	365	4000	18.50	90 x 400	28.50
AML-S 45 140-76	270-9064	140	76	244-293	365	4500	18.50	90 x 400	30.00
AML-S 50 140-76	270-9065	140	76	244-293	365	5000	18.50	90 x 400	32.00

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV6	300-0457-AP	305	270	106	140	606	506	16	200	50 x 100	18.10

