


Tapered - Galvanised Steel

Tubular steel, tapered, seamless. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of $H + E < 9,3$ m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

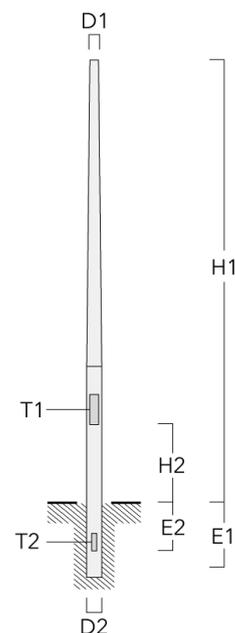

Description	Référence	D1	D2	E1	E2	H1	H2	Spigot	T1	T2	Weight
AM-K 30	240-0699	76	108	600	500	3000	600	Ø 76	85 x 300	50 x 150	26
AM-K 35	240-0484	76	108	700	500	3500	600	Ø 76	85 x 300	50 x 150	31
AM-K 40	240-0345	76	108	800	500	4000	600	Ø 76	85 x 300	50 x 150	35
AM-K 45	240-0536	76	114	800	500	4500	600	Ø 76	85 x 300	50 x 150	38
AM-K 50	240-0659	76	114	800	500	5000	600	Ø 76	85 x 300	50 x 150	43
AM-K 60	240-0561	76	121	1000	500	6000	600	Ø 76	90 x 400	50 x 150	58
AM-K 70	240-0627	76	133	1200	500	7000	600	Ø 76	90 x 400	50 x 150	79
AM-K 75	240-0186	76	133	1300	500	7500	600	Ø 76	90 x 400	50 x 150	84
AM-K 80	240-0511	76	168	1300	500	8000	600	Ø 76	90 x 400	50 x 150	119
AM-K 90	240-0200	76	168	1400	500	9000	600	Ø 76	90 x 400	50 x 150	135
AM-K 100	240-0206	76	168	1500	500	10000	600	Ø 76	90 x 400	50 x 150	186

Accessoires d'installation

Plaque de stabilisation

Description	Référence	D1
Plaque de stabilisation	300-0803	300



Crossettes AKV

Description	Référence	C1	D × L1	D × L2	H1	Poids (kg)
AKV2-76	300-0053	180	76x100	76x80	235	1.50

