


Tubular steel, one step. Hot dipped galvanised inside and out. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

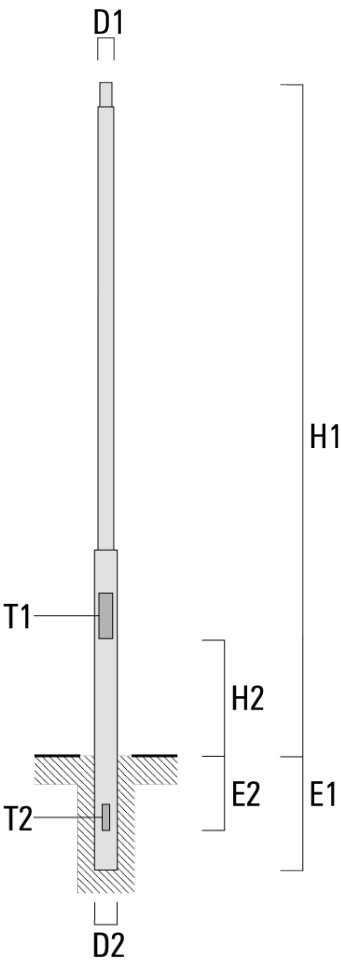

Description	Part ID	D1	D2	E1	E2	H1	Spigot	T1	T2	Weight
AM-S 30	240-1450	89	152	600	500	3000	76 x 80	90 x 400	50 x 150	29
AM-S 35	240-1451	89	152	700	500	3500	76 x 80	90 x 400	50 x 150	32
AM-S 40	240-1452	89	152	700	500	4000	76 x 80	90 x 400	50 x 150	35
AM-S 45	240-1459	89	152	700	500	4500	76 x 80	90 x 400	50 x 150	38