


Tapered - Aluminium

Tubular aluminium, tapered. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Specify required spigot dimensions when ordering. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole with cable protection.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting cast base, for installation to a concrete foundation or to a separate planted root, is available on request.

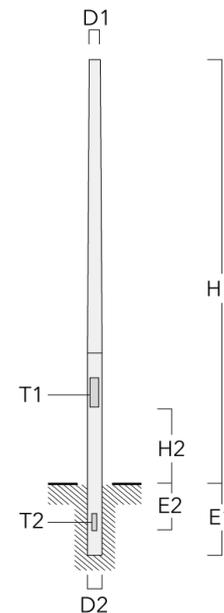

Beschreibung	Artikelnummer	D1	D2	E1	E2	H1	H2	Spigot	T1	T2	Weight
AML-K 30	240-0221	76	114	800	500	3000	600	Ø 76	85 x 400	50 x 150	10
AML-K 35	240-0226	76	114	800	500	3500	600	Ø 76	85 x 400	50 x 150	11
AML-K 40	240-0233	76	114	800	500	4000	600	Ø 76	85 x 400	50 x 150	12
AML-K 45	240-0238	76	114	800	500	4500	600	Ø 76	85 x 400	50 x 150	13
AML-K 50	240-0242	76	114	900	500	5000	600	Ø 76	85 x 400	50 x 150	15
AML-K 60	240-0248	76	120	900	500	6000	600	Ø 76	85 x 400	50 x 150	21