

**Constant - Aluminum**

Straight round aluminum, anchored. Chromated pre-treatment with superior powdercoat finish in black RAL9004, grey metallic RAL9007, white RAL9016 or dark bronze RAL8019. Service door included, varies by product size.

The shaft is extruded from all new 6063 alloy aluminum tubing and heat treated to produce a T6 temper. Cast from A356 alloy aluminum, the anchor base is heat treated to produce a T6 condition and inserted into the anchor base casting. The two pieces are joined by a continuous circumferential weld at the outside top and inside bottom of the anchor base. The anchor bolts and nuts recess in the base casting, sitting flush, and are covered by four (4) tamper-resistant aluminum nut cover discs. Anchor bolts provided with pole.


Refer to Individual Spec sheets for allowable wind loading (Square Feet) - attached at the bottom.

Specify Product Code

-  
Specify Pole Top or Tenon: 3"x3" Tenon (-T3x3), 3"x4" Tenon (-T3x4), 3"x4" Tenon (-T3x5), or Pole Cap (-CAP)

-  
Specify Finish Color: Black (-9004), Grey Metallic (-9007), White (-9016), or Dark Bronze (-8019); (consult WE-EF color chart for others)

SAMPLE: 695-1140-T3x5-9004

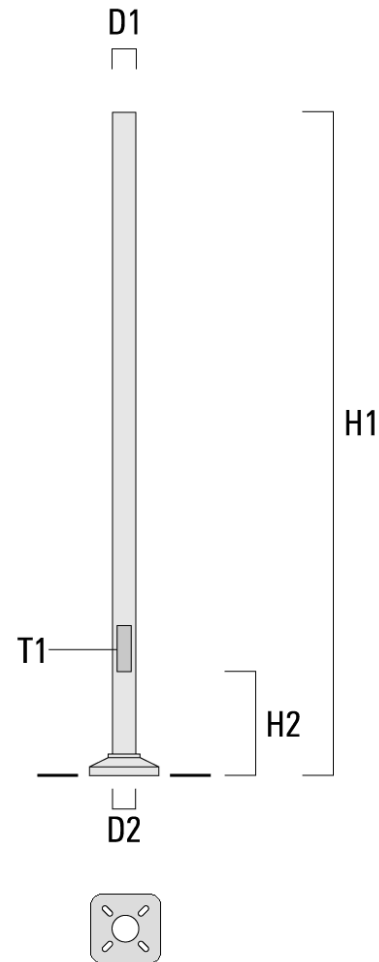

Description	Part ID	D1	D2	H1	H2	Spigot	WallThickness	Weight
AML-Z-008-40-125	693-1220	4	4	8 ft	23.62 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	19
AML-Z-10-40-125	693-1221	4	4	10 ft	23.62 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	22
AML-Z-10-50-125	693-1222	5	5	10 ft	23.62 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	27
AML-Z-12-40-125	693-1223	4	4	12 ft	23.62 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	26
AML-Z-12-50-156	693-1224	5	5	12 ft	23.62 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.16	38

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/05/2026

**Constant - Aluminum**

AML-Z-14-50-156	693-1225	5	5	14 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.16	44
						x 7.87/Ø 4.25 x 7.87		
AML-Z-16-50-188	693-1230	5	5	16 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.19	58
						x 7.87/Ø 4.25 x 7.87		
AML-Z-16-60-156	693-1231	6	6	16 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.16	59
						x 7.87/Ø 4.25 x 7.87		
AML-Z-18-50-188	693-1232	5	5	18 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.19	65
						x 7.87/Ø 4.25 x 7.87		
AML-Z-18-60-188	693-1233	6	6	18 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.19	78
						x 7.87/Ø 4.25 x 7.87		
AML-Z-20-60-156	693-1234	6	6	20 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.16	73
						x 7.87/Ø 4.25 x 7.87		
AML-Z-20-60-188	693-1235	6	6	20 ft	23.62 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5	0.19	86
						x 7.87/Ø 4.25 x 7.87		
AML-Z-08-60-156	693-0420	6	6	96	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	
AML-Z-10-60-156	693-0421	6	6	120	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	
AML-Z-12-60-156	693-0424	6	6	144	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	
AML-Z-14-60-156	693-0422	6	6	168	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	
AML-Z-16-60-156	693-0423	6	6	192	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	59
AML-Z-18-60-188	693-0425	6	6	216	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	78
AML-Z-20-60-188	693-0426	6	6	240	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	86
AML-Z-25-60-188	693-0427	6	6	300	23.62	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	106